

NP180N055TUK

MOS FIELD EFFECT TRANSISTOR

R07DS0593EJ0100 Rev.1.00 Dec 12, 2011

Description

The NP180N055TUK is N-channel MOS Field Effect Transistor designed for high current switching applications.

Features

• Super low on-state resistance

 $R_{DS(on)} = 1.40 \text{ m}\Omega \text{ MAX.} (V_{GS} = 10 \text{ V}, I_D = 90 \text{ A})$

- Low C_{iss} : $C_{iss} = 10700 \text{ pF TYP.} (V_{DS} = 25 \text{ V})$
- Designed for automotive application and AEC-Q101 qualified

Ordering Information

Part No.	Lead Plating	Pac	Package	
NP180N055TUK-E1-AY *1	Pure Sn (Tin)	Tape 800 p/reel	Taping (E1 type)	TO-263-7pin
NP180N055TUK-E2-AY *1			Taping (E2 type)	(MP-25ZT)

Note: *1 Pb-free (This product does not contain Pb in the external electrode)

Absolute Maximum Ratings $(T_A = 25^{\circ}C)$

Item	Symbol	Ratings	Unit
Drain to Source Voltage (V _{GS} = 0 V)	V_{DSS}	55	V
Gate to Source Voltage (V _{DS} = 0 V)	V_{GSS}	±20	V
Drain Current (DC) (T _C = 25°C)	I _{D(DC)}	±180	А
Drain Current (pulse) *1	I _{D(pulse)}	±720	А
Total Power Dissipation (T _C = 25°C)	P _{T1}	348	W
Total Power Dissipation (T _A = 25°C)	P _{T2}	1.8	W
Channel Temperature	T _{ch}	175	°C
Storage Temperature	T _{stg}	-55 to 175	°C
Repetitive Avalanche Current *2	I _{AR}	66	А
Repetitive Avalanche Energy *2	E _{AR}	435	mJ

Notes: *1 $\,T_{C}$ = 25°C, $P_{W} \leq$ 10 $\mu s,\, Duty\,\, Cycle \leq$ 1%

Thermal Resistance

^{*2} R_G = 25 Ω , V_{GS} = 20 \rightarrow 0 V


Electrical Characteristics (T_A = 25°C)

Item	Symbol	MIN.	TYP.	MAX.	Unit	Test Conditions
Zero Gate Voltage Drain Current	I _{DSS}	_	_	1	μΑ	$V_{DS} = 55 \text{ V}, V_{GS} = 0 \text{ V}$
Gate Leakage Current	I _{GSS}	_	_	±100	nA	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$
Gate to Source Threshold Voltage	$V_{GS(th)}$	2.0	3.0	4.0	V	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$
Forward Transfer Admittance *1	y _{fs}	75	150		S	$V_{DS} = 5 \text{ V}, I_{D} = 90 \text{ A}$
Drain to Source On-state Resistance *1	R _{DS(on)}	_	1.15	1.40	mΩ	$V_{GS} = 10 \text{ V}, I_{D} = 90 \text{ A}$
Input Capacitance	C _{iss}	_	10700	16050	pF	V _{DS} = 25 V
Output Capacitance	Coss	_	1200	1800	pF	$V_{GS} = 0 V$
Reverse Transfer Capacitance	C _{rss}	_	380	690	pF	f = 1 MHz
Turn-on Delay Time	t _{d(on)}	_	38	90	ns	$V_{DD} = 28 \text{ V}, I_D = 90 \text{ A}$
Rise Time	t _r	_	20	50	ns	V _{GS} = 10 V
Turn-off Delay Time	t _{d(off)}	_	140	280	ns	$R_G = 0 \Omega$
Fall Time	t _f	_	14	40	ns	
Total Gate Charge	Q_{G}	_	196	294	nC	V _{DD} = 44 V
Gate to Source Charge	Q _{GS}	_	51	_	nC	V _{GS} = 10 V
Gate to Drain Charge	Q_{GD}	_	45		nC	I _D = 180 A
Body Diode Forward Voltage *1	$V_{F(S-D)}$	_	0.9	1.5	V	I _F = 180 A, V _{GS} = 0 V
Reverse Recovery Time	t _{rr}	_	83	_	ns	$I_F = 180 \text{ A}, V_{GS} = 0 \text{ V}$
Reverse Recovery Charge	Q _{rr}	_	145	_	nC	di/dt = 100 A/μs


Note: *1 Pulsed test

TEST CIRCUIT 1 AVALANCHE CAPABILITY

$V_{GS} = 20 \rightarrow 0 \text{ V}$ $V_{GS} = 20 \rightarrow 0 \text{ V}$ V_{DS} V_{DS}



TEST CIRCUIT 2 SWITCHING TIME

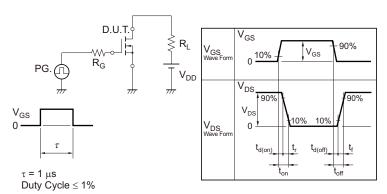

TEST CIRCUIT 3 GATE CHARGE


$$I_{G} = 2 \text{ mA}$$

$$V_{DI}$$


$$V_{DI}$$

Typical Characteristics $(T_A = 25^{\circ}C)$

DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA




TOTAL POWER DISSIPATION vs. CASE TEMPERATURE




T_C - Case Temperature - °C

FORWARD BIAS SAFE OPERATING AREA



V_{DS} - Drain to Source Voltage - V


TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

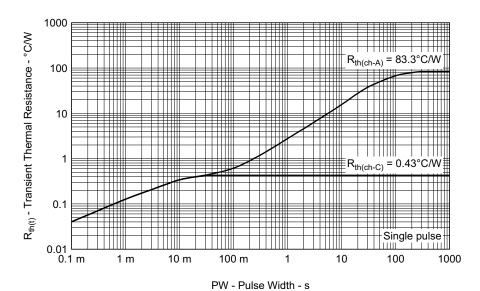

V_{GS(th)} - Gate to Source Threshold Voltage - V


 $R_{DS(on)}$ - Drain to Source On-State Resistance - $m\Omega$

DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE




V_{DS} - Drain to Source Voltage - V

GATE TO SOURCE THRESHOLD VOLTAGE vs. CHANNEL TEMPERATURE




 T_{ch} - Channel Temperature - $^{\circ}\text{C}$

DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT




FORWARD TRANSFER CHARACTERISTICS




V_{GS} - Gate to Source Voltage - V

FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT



I_D - Drain Current - A

DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE




V_{GS} - Gate to Source Voltage - V


 $R_{\text{DS(on)}}$ - Drain to Source On-State Resistance - $m\Omega$

 $R_{DS(on)}$ - Drain to Source On-State Resistance - $m\Omega$


DRAIN TO SOURCE ON-STATE RESISTANCE vs. CHANNEL TEMPERATURE




SWITCHING CHARACTERISTICS



SOURCE TO DRAIN DIODE FORWARD VOLTAGE




CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE




V_{DS} - Drain to Source Voltage - V

DYNAMIC INPUT/OUTPUT CHARACTERISTICS



Q_G- Gate Charge - nC

REVERSE RECOVERY TIME vs. DRAIN CURRENT




I_F - Drain Current - A


t_{rr} - Reverse Recovery Time - ns

Package Drawing (Unit: mm)

TO-263-7pin (MP-25ZT) (Mass: 1.5 g TYP.)

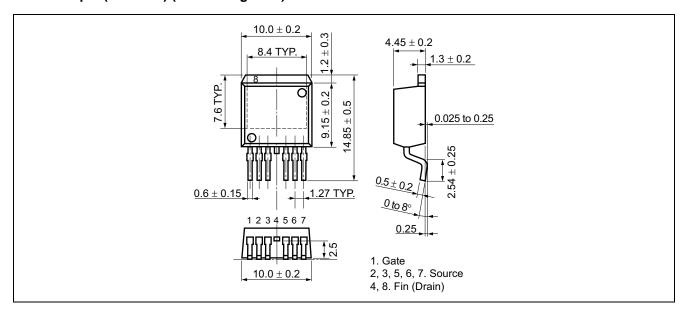

Equivalent Circuit

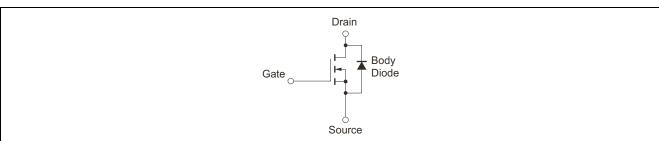

Remark: Strong electric field, when exposed to this device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred.

Revision History

NP180N055TUK Data Sheet

		Description		
Rev.	Date	Page	Summary	
1.00	Dec 12, 2011	_	First Edition Issued	

Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- 2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc
 - Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical "Specific": implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics



SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information

enesas Electronics America Inc. 80 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A. dl: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited 1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited Dukes Meadow, Millboard Road, Boume End, Buckinghamshire, SL8 5FH, U.K Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-2035-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No. 1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-5887-7589

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2868-9318, Fax: +852-2886-9022/9044

Renesas Electronics Taiwan Co., Ltd. 13F, No. 363, Fu Shing North Road, Taipei, Taiv Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd. 1 harbourFront Avenue, #06-10, keppel Bay Tower, Singapore 098632 Tel: +65-6213-0200, Fax: +65-6278-8001

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd. 11F., Samik Lavied' or Bidg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea Tel: 482-2-558-3737, Fax: 482-2-558-5141

© 2011 Renesas Electronics Corporation. All rights reserved.