

### Is Now Part of



## ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



# KA339/KA339A, KA2901


## **Quad Comparator**

### **Features**


- Single or Dual Supply Operation
- Wide Range of Supply Voltage KA339/KA339A, KA2901 : 2 ~ 36V (or ±1 ~ ±18V)
- Low Supply Current Drain 800µA Typ.
- Open Collector Outputs for Wired and Connectors
- Low Input Bias Current 25nA Typ.
- Low Input Offset Current ±2.3nA Typ.
- Low Input Offset Voltage ±1.4mV Typ.
- Input Common Mode Voltage Range Includes Ground.
- Low Output Saturation Voltage
- Output Compatible With TTL, DTL and MOS Logic System

### **Description**


The KA339/KA339A, KA2901 consist of four independent voltage comparators designed to operate from single power supply over a wide voltage range.



### **Internal Block Diagram**



## **Schematic Diagram**

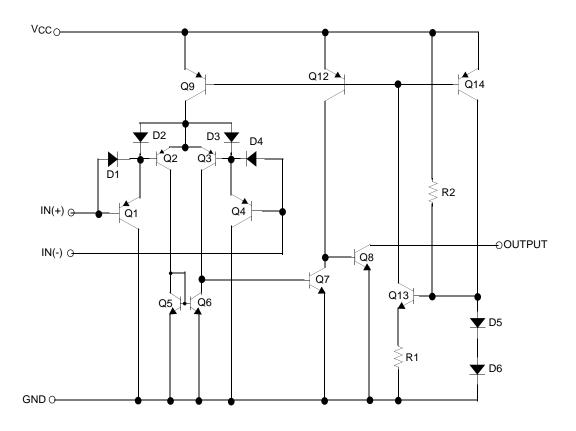

## **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Supply Voltage	Vcc	±18 or 36	V
Differential Input Voltage	VI(DIFF)	36	V
Input Voltage	VI	-0.3 to +36	V
Output Short Circuit to GND	-	Continuous	-
Power Dissipation	PD	570	mW
Operating Temperature KA339/KA339A KA2901	TOPR	0 ~ +70 -40 ~ +85	°C
Storage Temperature	TSTG	-65 ~ +150	°C

### **Electrical Characteristics**

(VCC = 5V,  $T_A = 25$ °C, unless otherwise specified)

Parameter	Cumbal	ool Conditions		KA339A			KA339			Unit
raidilletei	Symbol			Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
Input Offset Voltage Vic	1/10	VO(P) = 1.4V,	$Rs = 0\Omega$	-	1	2	-	1.4	5	mV
	V 10		Note1	-	-	4.0	-	-	9.0	
Input Offset Current	lio	IIN(+) - IIN(-), '	VCM = 0V	-	2.3	50	-	2.3	50	nA
			Note1	-	-	150	-	-	150	
Input Bias Current	1	VCM = 0V		-	57	250	-	57	250	nA
input bias Current	IBIAS		Note1	-	-	400	-	-	400	
Input Common Mode	V(D)	VCC = 30V		0	-	Vcc-1.5	0	-	Vcc-1.5	V
Voltage Range	VI(R)		Note1	0	-	Vcc-2	0	-	Vcc-2	V
Supply Current	Icc	VCC = 5V, R <sub>L</sub> = ∞		-	1.1	2.0	-	1.1	2.0	mA
Voltage Gain	Gv	V <sub>CC</sub> = 15V, R <sub>L</sub> $\ge$ 15kΩ (for large swing)		50	200	-	50	200	-	V/mV
Large Signal Response Time	TLRES	$V_I = TTL Logic Swing$ $V_REF = 1.4V, V_RL = 5V,$ $R_L = 5.1k\Omega (Note2)$		-	300	-	-	300	-	ns
Response Time	TRES	$V_{RL} = 5V, R_{L} = 5.1k\Omega$ (Note2)		-	1.3	-	-	1.3	-	μS
Output Sink Current	ISINK	$V_{I(-)} \ge 1V$ , $V_{I(+)} = 0V$ , $V_{O(P)} \le 1.5V$		6	18	-	6	18	-	mA
Output Saturation Voltage	VOAT	VI(-) ≥ 1V, VI(-	+) = 0V	-	140	400	-	140	400	mV
	VSAI	ISINK = 4mA	Note1	-	-	700	-	-	700	] ""
Output Leakage	lo(LKC)	VI(-) = 0V	V <sub>O</sub> (P) = 5V	-	0.1	-	-	0.1	-	nA
Current	l <sub>o</sub> (LKG)	$V_{I(+)} = 1V$	VO(P) =30V	-	-	1.0	-	-	1.0	μΑ
Differential Voltage	VI(DIFF)	Note1		-	-	36	-	-	36	V

### Note:

<sup>1.</sup> KA339 / KA339A:  $0 \le T_A \le +70^{\circ}C$ KA2901:  $-40 \le T_A \le +85^{\circ}C$ 

<sup>2.</sup> These parameters, although guaranteed, are not 100% tested in production.

## **Electrical Characteristics** (Continued)

(VCC = 5V,  $T_A = 25$ °C, unless otherwise specified)

Davamatar	Comple of	Ol Conditions			1114			
Parameter	Symbol			Min.	Тур.	Max.	Unit	
Input Offcot Voltage Vic		$VO(P) = 1.4V, RS = 0\Omega$		-	2	7	m\/	
Input Offset Voltage VIC	VIO		Note1	-	9	15	mV	
Input Offset Current	lio			-	2.3	50	nA	
			Note1	-	50	200	IIA	
Input Rice Current	IDIAC			-	57	250	nA	
Input Bias Current IBIAS		Note1		-	200	500	IIA	
Input Common		KA2901, VCC	=30V	0	-	Vcc-1.5		
Mode Voltage Range	VI(R)		Note1	0	-	Vcc-2	V	
Committee Comment	loo	RL =∞, VCC=5V		-	1.1	2.0	Λ	
Supply Current ICC		R <sub>L</sub> =∞, V <sub>C</sub> C =30V		-	1.6	2.5	mA	
Voltage Gain	Gv	V <sub>CC</sub> =15V, R <sub>L</sub> ≥15kΩ (for large swing)		25	100	-	V/mV	
Large Signal Response Time	TLRES	VI =TTL Logic Swing VREF =1.4V, VRL = 5V, RL =5.1kΩ (Note2)		-	300	-	ns	
Response Time	TRES	$V_{RL} = 5V$ , $R_{L} = 5.1$ k $\Omega$ (Note2)		-	1.3	-	μS	
Output Sink Current	ISINK	$V_{I(-)} \ge 1V$ , $V_{I(+)} = 0V$ , $V_{O(P)} \le 1.5V$		6	18	-	mA	
Output Saturation VSAT	\/a.=	V <sub>I</sub> (-) ≥ 1V, V <sub>I</sub> (+) =0V		-	140	400	>/	
	VSAI	ISINK = 4mA	Note1	-	-	700	mV	
Output Leakage ,		VI(-) = 0V	VO(P) = 5V	-	0.1	-	nA	
Current		$V_{I(+)} = 1V$	VO(P) = 30V	-	-	1.0	μΑ	
Differential Voltage	VI(DIFF)	-	Note1	-	-	36	V	

#### Note:

1. KA339 / KA339A:  $0 \le T_A \le +70^{\circ}C$  KA2901:  $-40 \le T_A \le +85^{\circ}C$ 

2. These parameters, although guaranteed, are not 100% tested in production.

## **Typical Performance Characteristics**




Figure 1. Supply Current vs Supply Voltage




Figure 3. Output Saturation Voltage vs Sink Current




Figure 5. Response Time for Various Input Overdrive-Positive Transition




Figure 2. Input Current vs Supply Voltage





Figure 4. Response Time for Various Input Overdrive-Negative Transition

### **Mechanical Dimensions**

### **Package**

### **Dimensions in millimeters**

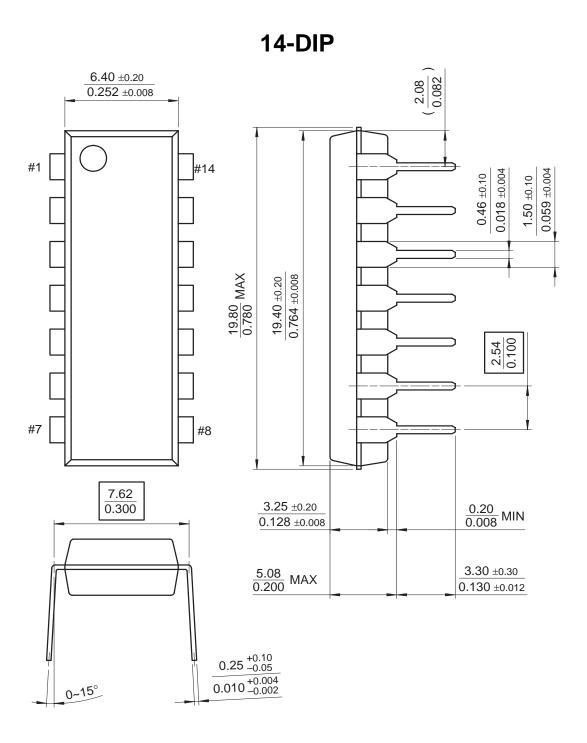


### **Mechanical Dimensions** (Continued)

### **Package**

#### **Dimensions in millimeters**

## 14-SOP

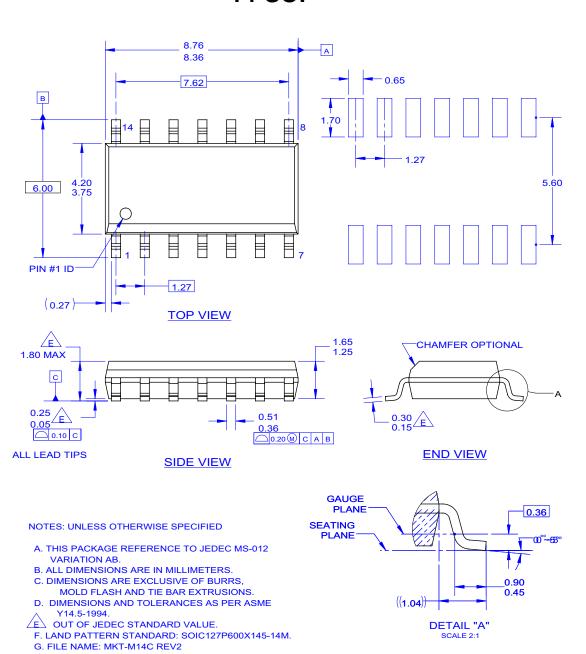

### **Ordering Information**

Product Number	Package	Operating Temperature
KA339	14-DIP	
KA339A	14-011	0 ~ +70°C
KA339D	14-SOP	0~+70 0
KA339AD	14-30F	
KA2901D	14-SOP	-40 ~ +85°C

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see any inability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and ex

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative