## 15 Series

RoHS Compliant


**GENERAL PURPOSE** 

APPLICATION OPERATING TEMPERATURE: -40°C to +85°C


APPROVALS<sup>1</sup>: c(VL)us


Part Number	Length mm [Inch]	Width mm [Inch]	Screw Size	Cable Ties Width up to mm [Inch]
15-1919	19.0 [.750]	19.0 [.750]	M5 [#10]	3.6 [.140]
15-2525	28.0 [1.10]	28.0 [1.10]	M5 [#10]	4.8 [.189]
15-4040	40.0 [1.50]	40.0 [1.50]	M5 [#10]	9.0 [.354]

## **PART NUMBER SYSTEM**

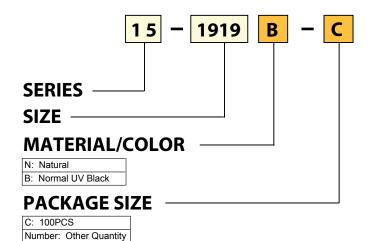







Notes: 1. 15-4040 is not UL approved