

# T-1 (3mm) SOLID STATE LAMP

PRELIMINARY SPEC

Part Number: WP908A8GD

Green


### **Features**

- •Low power consumption.
- ●Popular T-1 diameter package.
- General purpose leads.
- •Reliable and rugged.
- ●Long life-solid state reliability.
- •Available on tape and reel.
- ●RoHS compliant.

## Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

## **Package Dimensions**

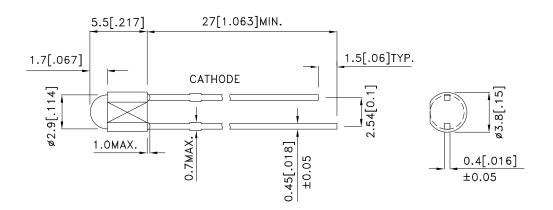

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
   Specifications are subject to change without notice.





SPEC NO: DSAJ0585 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 1 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101021508

# Kingbright

## **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
		2.	Min.	Тур.	201/2
WP908A8GD	Green (GaP)	GREEN DIFFUSED	5	25	80°

- 1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR = 5V

- Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

### Absolute Maximum Ratings at TA=25°C


Parameter	Green			
Power dissipation	62.5	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

### Notes:


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
  2. 2mm below package base.
  3. 5mm below package base.


SPEC NO: DSAJ0585 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101021508


# **Kingbright**

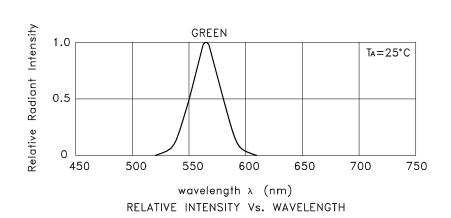


Green WP908A8GD










PAGE: 3 OF 4


ERP: 1101021508



SPEC NO: DSAJ0585 REV NO: V.1 DATE: JAN/07/2009

APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.F.Lu

# **Kingbright**

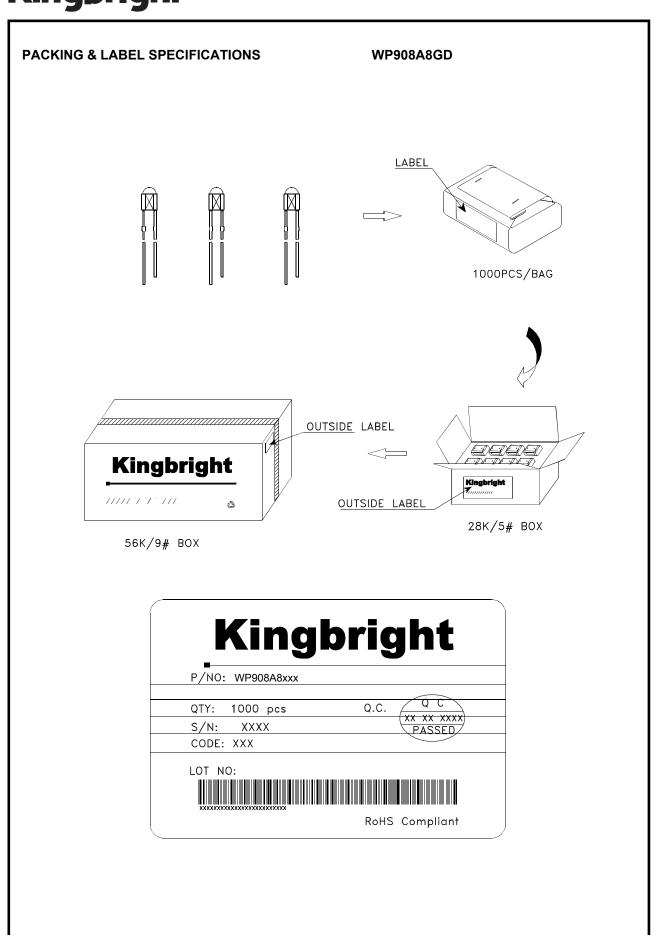

SPEC NO: DSAJ0585 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JAN/07/2009 DRAWN: Y.F.Lu PAGE: 4 OF 4 ERP: 1101021508