


PART NUMBER


SSP-MTCV1


REV.

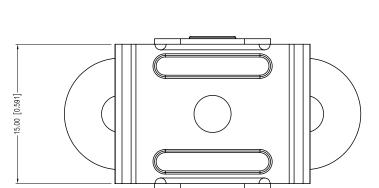








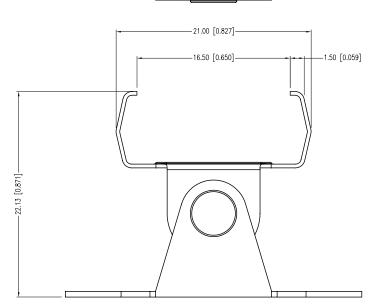

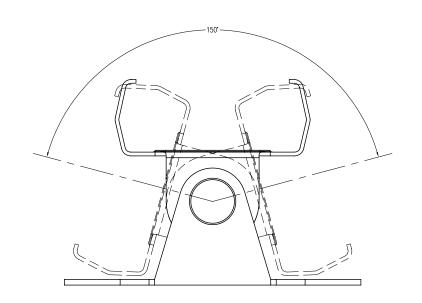

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.001}_{-0.001}$ PRECISION MAX.= $^{+0.001}_{-0.001}$ MAX.= $^{+0.001}_{-0.001}$ PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MIN= $^{+0.001}_{-0.001}$ PRECISION MAX.= $^{+0.001}_{-0.001}$ PRECISION MAX.=



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP SWIVEL MOUNTING CLIP FOR LED LIGHT BAR.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. SECEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMMATION TO ALL THIRD PARTIES.

ON	UNC	ONI	ROL	ED DOCUMENT			
	DATE:	07.	13.11		DRAWN	BY:	AB
	PAGE:	1 (DF 1		CHKD E	BY:	KF
	SCALE:	N	ITS		APRVD	BY:	DT
	UNIT: mm [INCH]				Pb		