

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

ULV

Chip Type, High Voltage.
Long Life.



- Chip Type, high voltage and long life.
- Load life of 10000 hours at +105°C
- Applicable to automatic mounting machine using carrier tape.
- Adapted to the RoHS directive (2011/65/EU).


ULV ← Long Life → **ULR**




■ Specifications

Item	Performance Characteristics									
Category Temperature Range	-40 to +105°C									
Rated Voltage Range	160 to 500V									
Rated Capacitance Range	1.8 to 33μF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current	Rated voltage (V)	160 to 450				500				
	-	0.04CV+100(μA)max.(1 minute's)				0.04CV+200(μA)max.(1 minute's)				
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C									
	Rated voltage (V)	160	200	250	400	450	500			
	tan δ (MAX.)	0.20	0.20	0.25	0.25	0.30	0.30			
Stability at Low Temperature	Measurement frequency: 120Hz									
	Rated voltage (V)	160	200	250	400	450	500			
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	6	6	10	10	15	15		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 10000 hours at 105°C.					Capacitance change	Within ±30% of the initial capacitance value			
						tan δ	300% or less than the initial specified value			
						Leakage current	Less than or equal to the initial specified value			
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.									
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right when they are removed from the plate.					Capacitance change	Within ±10% of the initial capacitance value			
						tan δ	Less than or equal to the initial specified value			
Marking	Black print on the case top.									

■ Chip Type

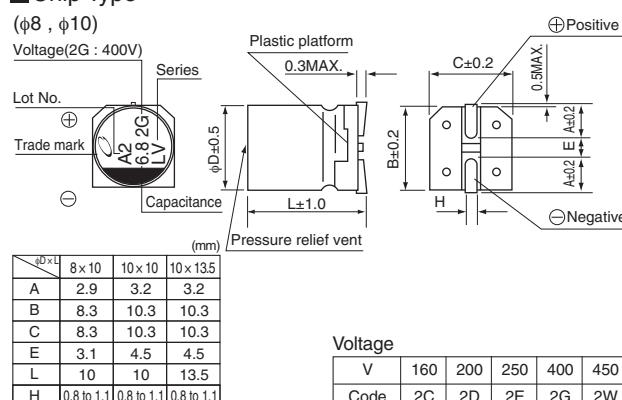

Type numbering system (Example : 400V 6.8μF)

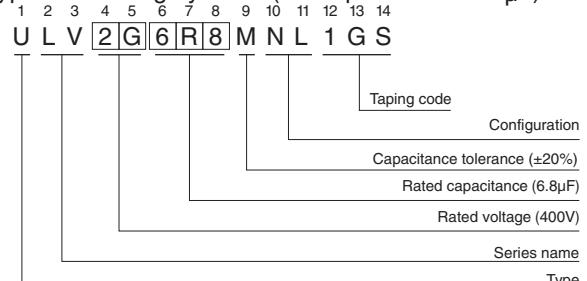

■ Dimensions

Cap.(μF)	V	160	200	250	400	450	500
Code		2C	2D	2E	2G	2W	2H
1.8	1R8						
3.3	3R3						
3.9	3R9						
4.7	4R7						
5.6	5R6						
6.8	6R8						
7.5	7R5						
8.2	8R2						
10	100						
12	120						
15	150	8 × 10	50				
18	180			10 × 10	50		
22	220	10 × 10	65	10 × 13.5	55		
27	270						
33	330	10 × 13.5	70				
						Case size φD × L (mm)	Rated ripple

Rated ripple current (mA rms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.