

TAIYO YUDEN

PRELIMINARY SPECIFICATIONS

LCD Backlight Driver

Model

SIPF200A-RH

RoHS
COMPLIANT

12 Volt Input

Industrial Grade Single Tube CCFT Inverter

Brightness Control

Physical Specifications

Dimensions:	22.7mm x 96.5mm x 7.3mm (0.894" x 3.79" x 0.287")
Weight:	20g (0.704 oz.)
Operating Temp:	0 to 55°C, convection cooling
Relative Humidity:	20% to 90%, non-condensing
Storage:	-20 to 85°C/5-95% RH non-condensing
Impact Resistance:	50G half wave per 2 msec
Vibration Resistance:	10-55-10 Hz/min @ 1.5mm



Input Specifications*

Item	Condition	Standard
Input Voltage Rated Tolerance	— Continuous Operation Starting Condition (Discharge Starting Voltage)	12.0 Vdc 8.0 Vdc - 20.0 Vdc 8.0 Vdc - 20.0 Vdc
Max. Input Current	$V_{IN} = 8.0$ Vdc Luminance @ Max.	0.75 A
Input Leak Current	$V_{IN} = 20.0$ Vdc Control terminal = H(V_{IN}) On/Off	12.0 μ A (Lamp Off)
Max. Rush Current	$V_{IN} = 20.0$ Vdc Luminance @ Max.	20.0 A _{zero-p} /15 μ S Max.
Max. Input Power	$V_{IN} = 8.0$ Vdc Luminance @ Max.	5.1 W Typical
On/Off Control Terminal Input Current	Control Terminal L = 0.0 - 0.4 Vdc $V_{IN} = 20.0$ Vdc	$I_{LOW} = -2.0$ mA (Lamp Lighting)
	Control Terminal H = Open or V_{IN}	— (Lamp Off)

*Above specifications occur @ 25 \pm 5°C.

Output Specifications*

Item	Condition	Standard		
		MIN	TYP	MAX
Non-Loaded Output Voltage (Vrms)	$V_{IN} = 8.0$ Vdc	1500	—	—
Tube Current (mArms)	Luminance @ Max. Luminance @ Min.	5.5 2.5	6.0	6.5
Max. Power Output (W)	$V_{IN} = 12.0$ Vdc/Luminance @ Max.	—	—	4.0
Ignition Frequency (kHz)	Luminance @ Max.	—	50	—
DC/DC Converter Frequency (kHz)	Luminance @ Max.	—	220	—


*Above specifications occur @ 25 \pm 5°C & $V_{IN} = 8.0 - 20.0$ Vdc.

Model

SIPF200A-RH

Luminance Variance

Item	Condition	Applied Voltage	Output Current
Luminance @ Max.	Btwn. pin 4 & pin 5	0.0 Vdc	6.0 mA
Luminance @ Min.	Btwn. pin 4 & pin 5	4.5 Vdc	2.5 mA

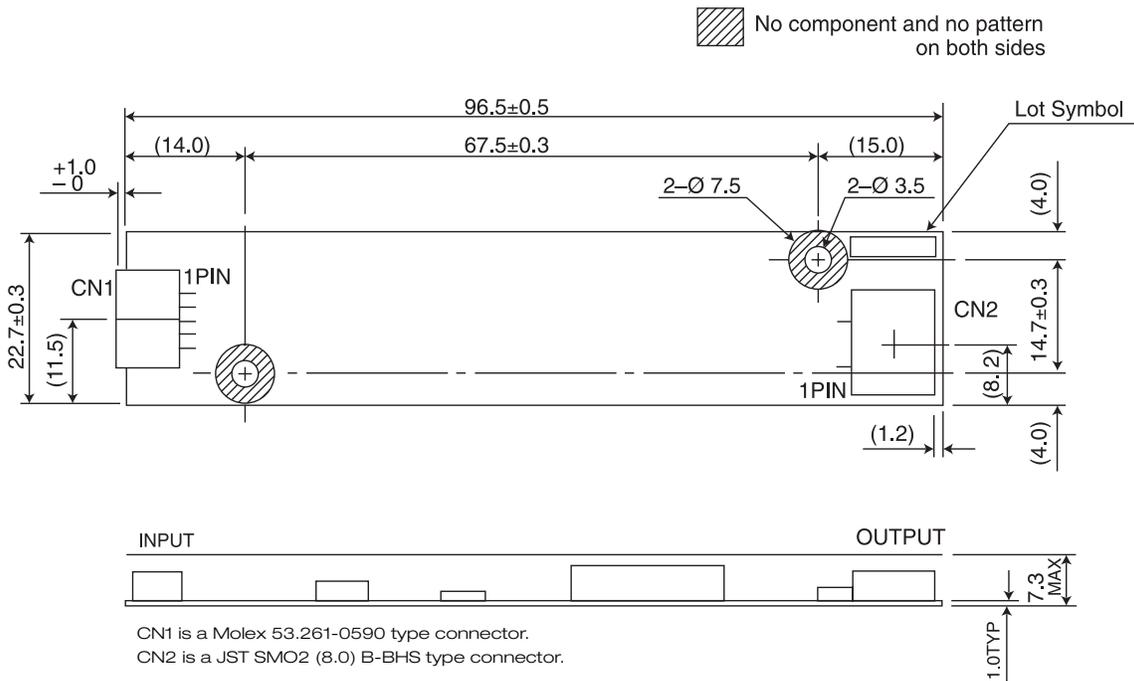

© Copyright 2007 TAIYO YUDEN (U.S.A.), INC. Specifications subject to change without notice.

TAIYO YUDEN

TAIYO YUDEN (U.S.A.), INC.
 440 Stevens Avenue, Suite 300 Solana Beach, CA 92075
 (858) 350-6800 / Fax: (858) 350-6854
(800) 263-4532 www.t-yuden.com inverters@t-yuden.com




FM 32227

Model

SIPF200A-RH


Tech Notes

Connection Diagram

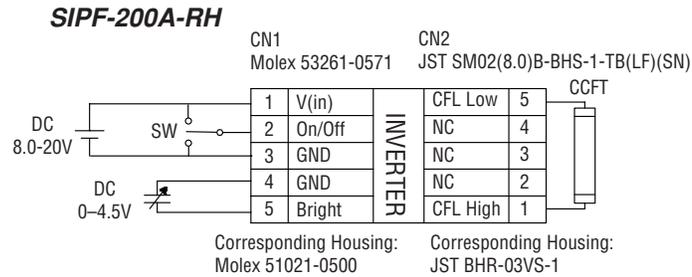

Output Current Optimization Method

Maximum output current can be adjusted by applying bias voltage between brightness control pins as shown below.

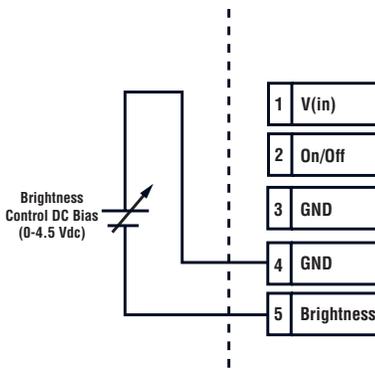


	DC Bias Voltage	Output Current
Luminance Max.	0 Vdc	6.0 mA
Luminance Min.	4.5 Vdc	2.5 mA

On/Off Control

The on/off control is achieved by using the on/off pin on the input side of SIPF200A-RH. The circuit for the remote on/off circuitry consists of an active low TTL switch. When the circuit is open, the IC Vcc is cut off. When the circuit is closed, IC Vcc is activated. A mechanical switch or a TTL/CMOS gate needs to be placed between the remote on/off pin and ground creating a condition where the circuit is closed to activate the inverter. Either one of the following will be required for the inverter to operate:

One recommended use of logic switch for remote on/off is shown in the diagram below. Electrical specification for on/off terminal is Low 0 to 0.4V, -0.4 mA or higher when switch is closed.

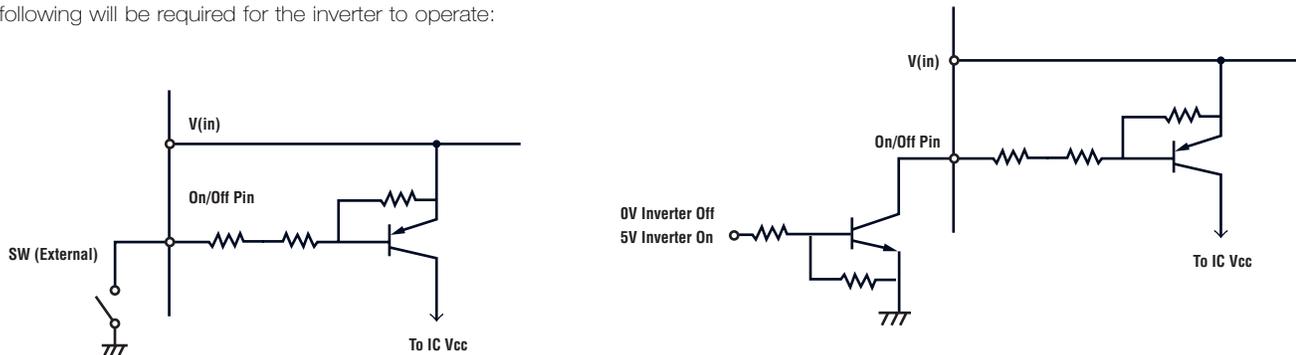

1. Tie on/off pin to ground.
2. Add mechanical switch between on/off pin and ground, close switch.
3. Add TTL/CMOS switch between on/off and ground. Circuit must be closed for unit to operate (as shown above right).