
# Pomona®

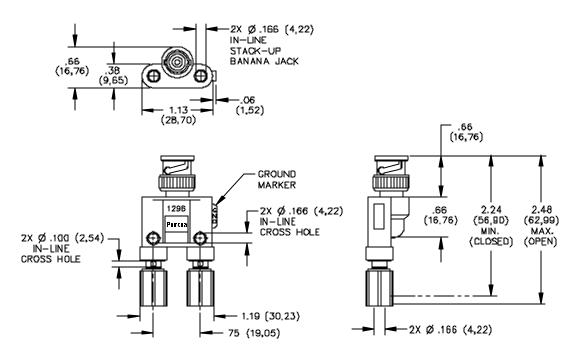

## **FEATURES:**

- Provides a method for Spade Lugs, Banana Plugs or .080" Tip Plugs to interface with a BNC Jack
- The high voltage connector allows usage above the standard BNC voltage

## **MATERIALS:**

#### Body:

Insulation: ABS Plastic Binding Post: Nickel plated brass Binding Post Collar: Insulation: Polycarbonate Body: Electroless nickel plated brass

## **RATINGS:**

Operating Voltage: 5000V Peak Operating Temperature: +50°C (+122°F) Max.

## **ORDERING INFORMATION:** Model 3291

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 5/28/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d3291\_1\_02.doc