

E



D

C


B

A

MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING



パネル取付穴寸法 (厚さ 1.52 最大)  
RECOMMENDED PANEL HOLE DIMENSION (THK. 1.52 MAX)

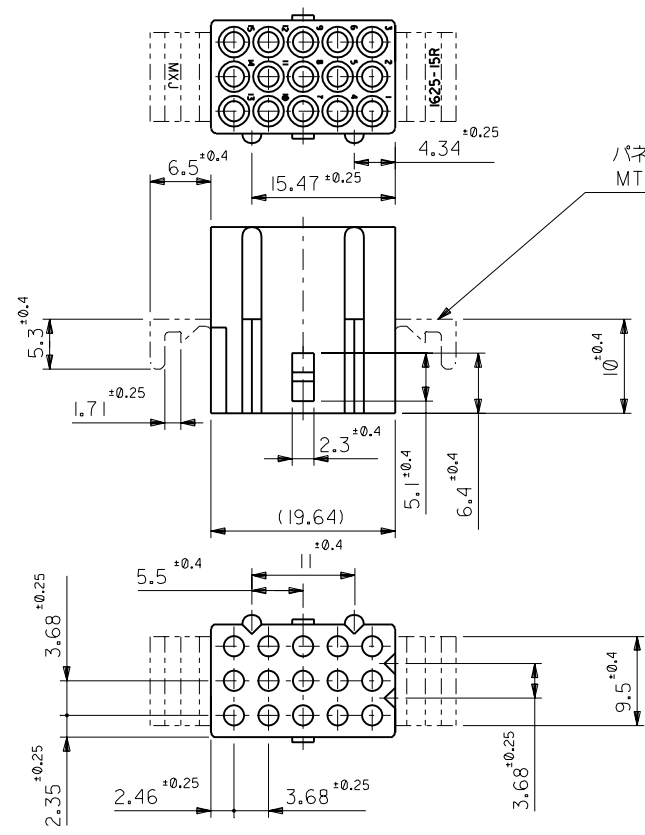

パネル取付耳 (表参照)  
MTG. EARS (SEE CHART)

注記  
NOTE

材質: ZYTEL 101. (ナイロン66, 94V-2)  
MATERIAL: ZYTEL 101. (NYLON66, 94V-2)

1625-15R1	39-03-3157	無 WITHOUT
1625-15R	39-03-3156	有 WITH
ENG. NO.	PART NO.	MTG. EARS

材料 MATERIAL		材中参照 REFER TO DRAWING	
仕上げ FINISH		---	
適用電線範囲 WIRE RANGE		---	
被覆外径 INS. RANGE		---	
DRAWN BY '96/07/03	CHK'D BY '96/07/03	DR. DATE	SCALE 2 : 1
H.IIJJIMA	M.FUKUSHIMA	M. ENOMOTO	
再作図 REDRAWN		DR. CHK.	DATE
LCT0305			
変更内容 REVISION RECORD			
LTR			

MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
REVISE ONLY ON CAD SYSTEM	
TITLE 名称	
.062 DIA. 15 CIRCUIT RECEPT. HOUSING	
DWG. NO.	REV
SD-1625-15R*	D

角度 ANGLE	±3°
30° 以上 OVER	+0.3
10° 以上 30° 未満 UNDER	+0.25
10° 未満 UNDER	+0.2
一般公差 GENERAL TOLERANCES	