



LOADING PATTERN MATING SIDE

f	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
d	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
c	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
b	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
a	6	6	5	5	5	5	6	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
POS	0	1	0	5	1	0	5	1	0	2	0	5										


LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

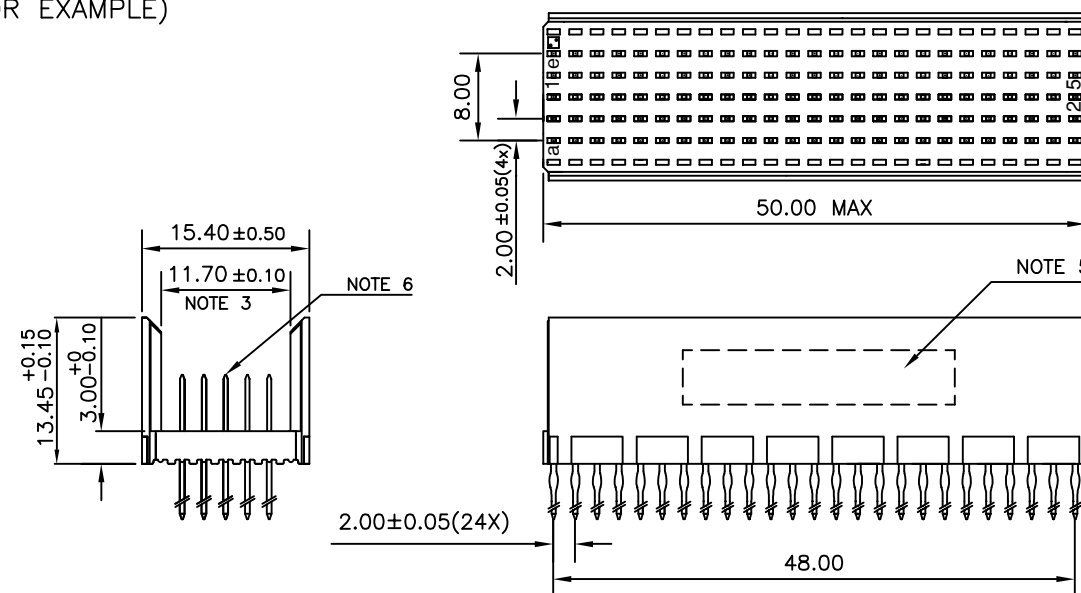

CONTACT OVERVIEW

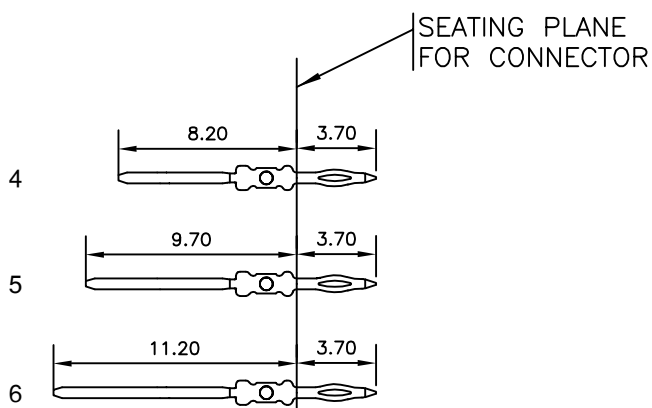

LAY-OUT P.C.B.-HOLE

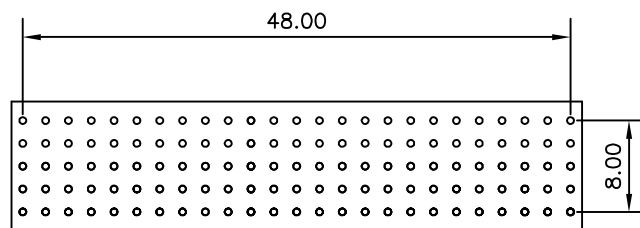

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

HM2P08PDE310

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
8. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P08PDE310----

mat'l. code SEE NOTE 4			surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family MILLIPACS						
ltr			ecn no		dr		date		tolerances unless otherwise specified						
A			I04-0027		MINI		2004/04/07		angles		linear		.0±0.2		
B			I05-0188		MINI		2005/10/13		0°±1°				.00±0.1		
C			I06-0077		MINI		2006/06/26						scale -		
							dr		MINI K VANDANATH		2004/04/07		sheet 1 of 1		
							enr		BIJU K PAUL		2004/04/07		size A3		
							chr		BIJU K PAUL		2006/06/26		type Product Customer Drawing		
							appd		BIJU K PAUL		2006/06/26				
sheet index		revision sheet		C		1									