

## Front adapters - FLKM S135-470-4UC/I/S400 - 2314626

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S135/S400 adapter links a SIMATIC® S5 plug directly with the basic SIMATIC® S7 400 card.  
Conversion: 6ES5 470-4UA13 / 6ES5 470-4UC13 (current measurement) to 6ES7 432 1HF00-0AB0



### Key commercial data

Packing unit	1 pc
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### General

Nominal voltage $U_N$	24 V DC
Max. permissible current	4 A (per path)
	4 A (per connection, supply via separate power supply)
Connection type, connector	SIEMENS S5-135 U pin strip
Mounting position	any
Standards/regulations	DIN EN 50178
	IEC 62103

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### Supported controller

Controller	SIEMENS S5-135 U
- suitable I/O card	6ES5 470-4UA13
	6ES5 470-4UC13

# Front adapters - FLKM S135-470-4UC//S400 - 2314626

## Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27249205
eCl@ss 7.0	27249205
eCl@ss 8.0	27249205

## ETIM


ETIM 2.0	EC000237
ETIM 3.0	EC000237
ETIM 4.0	EC000237
ETIM 5.0	EC002584

## UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Drawings

Circuit diagram

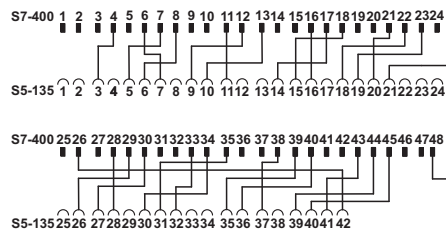

Connection scheme FLKM S135-470-4UC//S400