TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:

0.0	± 0.20	ANGLE	x°
0.00	± 0.10		
0.000	± 0.05		

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	1
UPDATE INSULATOR DESIGN R.STA.MONICA JUNE.18/2014	2

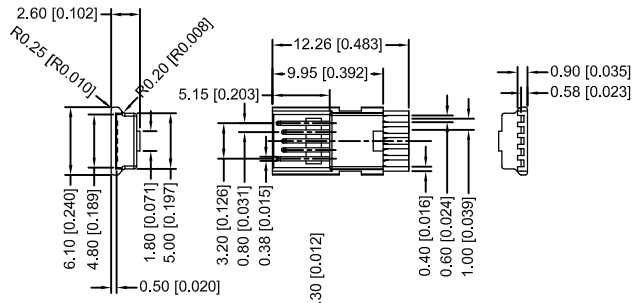

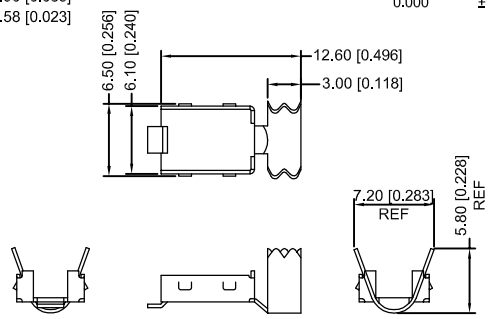

TOP METAL SHELL

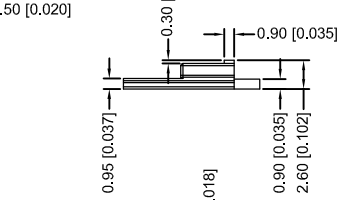



INSULATOR

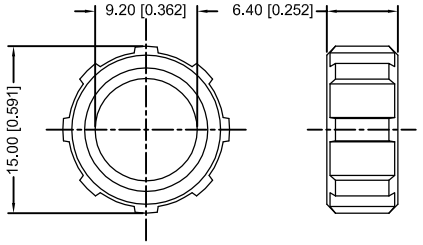

NUT

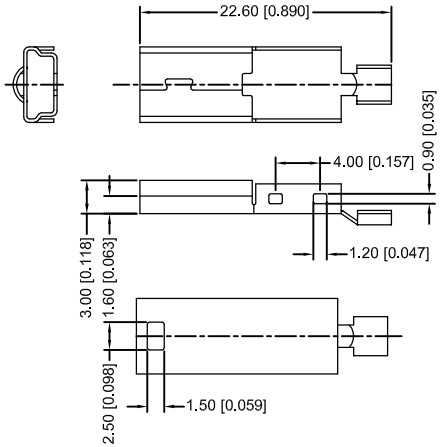

BOTTOM METAL SHELL

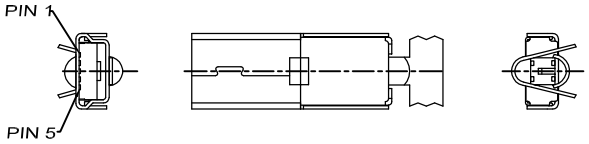

RECOMMENDED ASSEMBLY

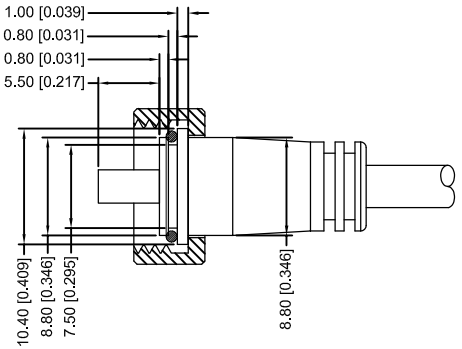

E-seal
Waterproof Connectors

1. MATERIAL :
   - 1-1. HOUSING : PBT UL 94V-0
     COLOR : BLACK
   - 1-2. CONTACT : BRASS
   - 1-3. NUT: PBT UL94V-0
   - 1-4. O-RING : NBR (1*8) ; COLOR : BLACK.

2. FINISH :
   - 2-1. CONTACT AREA : GOLD PLATED
     OTHER AREA : GOLD FLASH
     SOLDER AREA : BRIGHT TIN

3. SPECIFICATION:
   - 3-1. WATER PROOF: IPX7

4. OPERATING TEMPERATURE:-25C TO +85C

WATERPROOF MINI USB TYPE B, 5P (MALE)

ACAD REFERENCE NO.: 690-W05-260-043	
DRAWN: R.STA.MONICA	DATE: MAY.01/2014
CHECKED:	DATE:
PART NUMBER 690-W05-260-043	SHEET 1 OF 1
DRAWING NUMBER 690-W05-260-043	ISSUE 2

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.