
## OA4715 'Challenger Series'



## AC Fan - 115V, 230V 120x38mm (4.7"x 1.5")



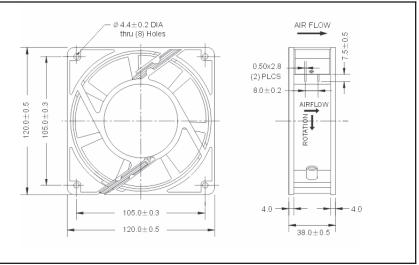

Frame	Diecast Aluminum			0.40						
Impeller	PBT, UL94V-0 plastic	<u>Operating Temperature</u> Ball Bearing -10C ~ +70C	6	0.35			_	-	+	
Connection	Terminals	Storage Temp -20C ~ +80C	e ("H2O)	0.30					$\downarrow$	
Motor	AC shaded pole, impedance protected	Life Expectancy Ball Bearing 60,000 hours (L10 at 40C)	ic Pressure	0.20 0.15						
Bearing System	Dual ball	Weight: ~1.2 lbs.	Static	0.10						
Insulation Resistance	>100M ohm between lead- wire and frame (500VDC)			0.05						
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	m4			0 2	20 40 Airfl	0 60 ow (C		0 100	120

Part Number	OA4715-12TB	OA4715-23TB				
Nominal Voltage	115 VAC	230 VAC				
Nominal Current	0.30 A	0.23 A				
Rated Power	24 W (60Hz)	24 W (60Hz)				
Rated Speed (RPM)	3000	3000				
Airflow (CFM)	110	110				
Noise Level (dB)	44	44				
Max. Static Pressure	0.37" H <sub>2</sub> O	0.37" H <sub>2</sub> O				



