


Installation Guide

Elinx ESW626 Family

26 Port 19 inch
Unmanaged Rackmount Ethernet Switch



ESW626 Series

Documentation Number: ESW626series-0913m



International Headquarters:
707 Dayton Road
Ottawa, IL 61350 USA

Phone (815) 433-5100

Website: www.bb-elec.com

Sales e-mail: orders@bb-elec.com

Technical Support: support@bb.elec.com

European Headquarters

B&B Electronics

Westlink Commercial Park

Oranmore, Co. Galway, Ireland

Phone +353 91-792444

Website: www.bb-europe.com

Sales e-mail: sales@bb-europe.com

Technical Support: support@bb-europe.com

Original – March 2011

©2011 No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photography, recording, or any information storage and retrieval system without written consent. Information in this manual is subject to change without notice, and does not represent a commitment on the part.

B&B Electronics Manufacturing shall not be liable for incidental or consequential damages resulting from the furnishing, performance, or use of this manual. All brand names used in this manual are the registered trademarks of their respective owners. The use of trademarks or other designations in this publication is for reference purposes only and does not constitute an endorsement by the trademark holder.

Installation Guide Documentation Number: ESW626series-0913m

B&B Electronics Mfg Co Inc – 707 Dayton Rd - PO Box 1040 - Ottawa IL 61350 - Ph 815-433-5100 - Fax 815-433-5104 – www.bb-elec.com
B&B Electronics – Westlink Commercial Park – Oranmore, Galway, Ireland – Ph +353 91-792444 – Fax +353 91-792445 – www.bb-europe.com

Table of Contents

OVERVIEW	1
PACKAGE CHECKLIST	2
ESW626 FAMILY	2
Features.....	2
Front Panel	2
Back Panel.....	3
LED Description.....	3
Mounting Options	4
Dimensional Drawing.....	4
PORTS	5
RJ45.....	5
Gigabit Copper/SFP (mini-GBIC) COMBO ports.....	5
SFP Installation and Connection	7
Cabling	9
100Base FX SC Fiber	9
Fiber connection illustration	10
POWER INPUT CONNECTIONS	10
SPECIFICATIONS	10

Overview

B&B Electronics Elinx family of Industrial rack mount Ethernet switches have been designed to meet light heavy Industrial communication requirements.

The ESW626 Unmanaged family offers a variety of Industrial models. The switch configurations range from 26 ports RJ45 copper to RJ45 copper with multi mode, single mode, and or SFP gigabit ports.

They will support IEEE 802.3 (10Base-T), IEEE 802.3u (100BaseTX) and (100BaseFX), 802.3ab 1000Base(X), IEEE 802.3z for 1000BaseSX/LX/LHX/ZX, 802.3x for flow control, full and half duplex, MDI/MDIX auto-sensing.

The ESW626 series accepts 18VDC to 36VDC input voltage using terminal blocks. The operating temperature range for standard models are -10°C to 60°C with wide temperature models supporting -40°C to 75°C. The ambient relative humidity rating is 5 to 95% (Non-condensing).

Package Checklist

The ESW626 will ship with the following items.


- ESW626 series unit
- Installation guide

ESW626 Family

Features


- 10Base-T, 100BaseTX, 100BaseFX, 1000BaseSX/LX/LHX/ZX, 1000Base(X)
- 10/100Mbps, full and half duplex, MDI/MDIX auto -sensing
- 2 copper/SFP combo ports for Gigabit Ethernet
- RJ45 shielded connectors
- IP30 metal enclosure
- Rack mount
- Shock, vibration, and freefall
- 8k MAC address
- -10°C to 60°C or -40°C to 75°C (Wide Temperature Models)

Front Panel

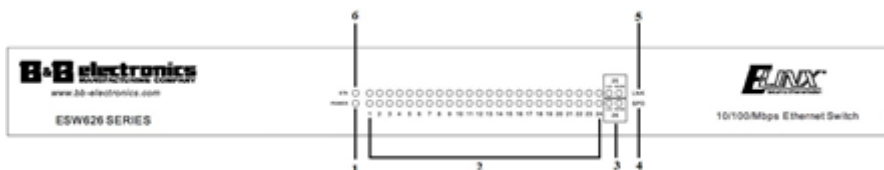

1. Power LED
2. RJ45 LED
3. Fiber, Combo RJ45 / SFP LED
4. Speed
5. Link
6. System Ready

Back Panel

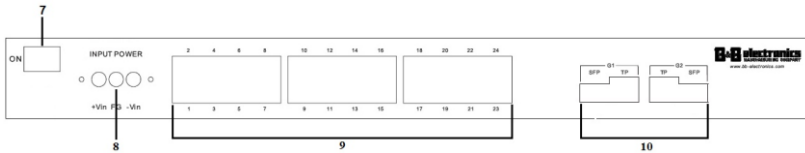


7. On / OFF Switch
8. Power Input
9. RJ45 Port
10. Fiber, Combo SFP or RJ45 Port


LED Description

LED	Status	Description
PWR	Green	Power Applied
	Off	No power
STA	Green	System Ready
	Off	System down
10/100 Copper Upper LED	Green	100Mbps
	Off	10Mbps
10/100 Copper Lower LED	Green	Link
	Blinking	Activity
	Off	Not connected to network
Fiber LED	Green	Link
	Blinking	Activity
	Off	Not connected to network
10/100/1000 Copper Upper LED	Green	1000Mbps
	Off	10/100Mbps
10/100/1000 Copper Lower LED	Green	Link
	Blinking	Activity
	Off	Not connected to network
SFP LED	Green	1000Mbps
	Blinking	Activity
	Off	Not connected to network

Mounting Options

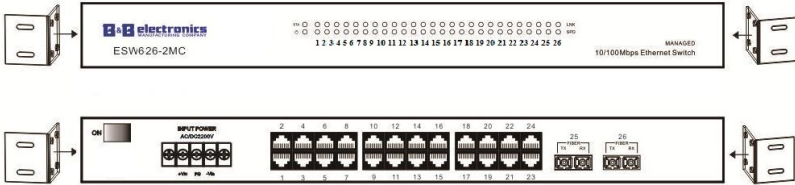

Dimensional Drawing


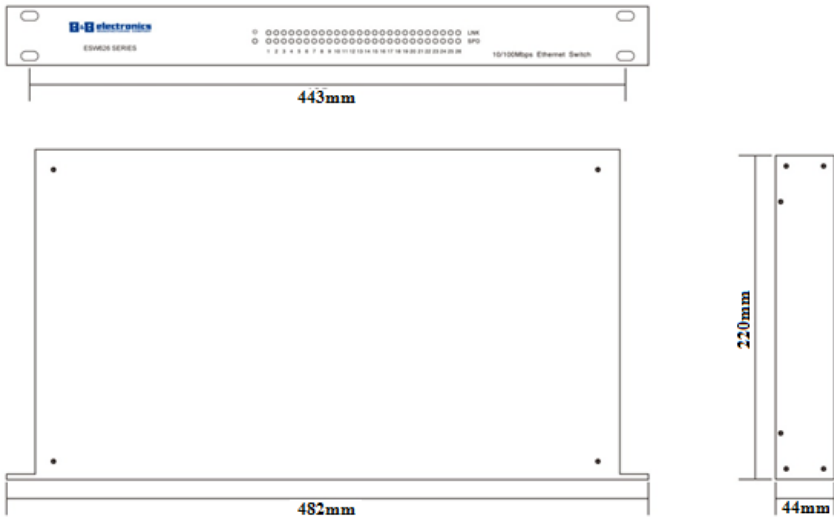


Ports

RJ45

The RJ45 copper ports support auto-MDI/MDIX operation. This feature allows network connections to computers, servers, or other switches using straight-through or crossover cables (See Figure below). Straight-through cable connections: pins 1, 2, 3 and 6, at one end of the cable, are connected straight-through to pins 1, 2, 3 and 6 at the other end of the cable. The table below shows the 10BASE-T/100BASE-TX MDI and MDI-X port pin outs.


Pin	MDI-X Signal Name	MDI Signal Name
1	Receive Data plus (RD+)	Transmit Data plus (TD+)
2	Receive Data minus (RD-)	Transmit Data minus (TD-)
3	Transmit Data plus (TD+)	Receive Data plus (RD+)
6	Transmit Data minus (TD-)	Receive Data minus (RD-)



Gigabit Copper/SFP (mini-GBIC) COMBO ports

The ESW626 can be ordered with up to two auto-detect Gigabit copper/SFP combo ports. The Gigabit Copper (10/100/1000Mbps) ports use Category 5e or above UTP/STP cable for connection. The SFP slots can be used to connect the network segment with single or multi-mode fiber. For installation, the module needs to be adjusted so as to be aligned correctly and then moved into the SFP slot until a click is heard. With the SFP module (fiber optic connection), the switch will be able to transmit

speeds up to 1000 Mbps. Fiber optic communications will prevent harsh environment interfaces from being introduced into the network and will extend transmission distance.

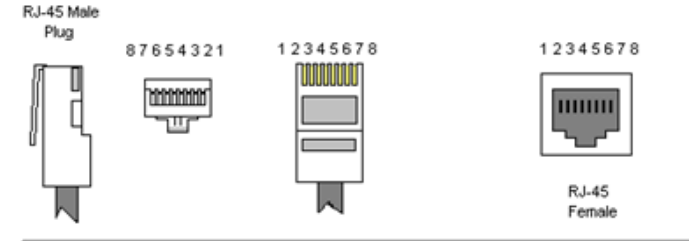


Color Standard
EIA/TIA T568A

Ethernet Patch Cable



Color Standard
EIA/TIA T568A

Ethernet Crossover Cable

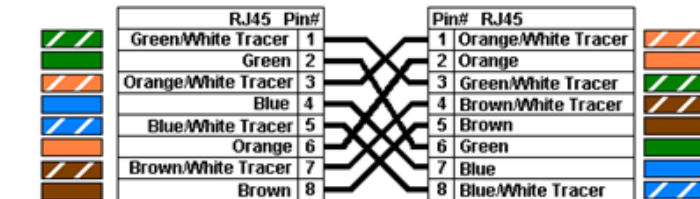


"A" is earlier

2006.06.28


Color Standard
EIA/TIA T568B

Ethernet Patch Cable

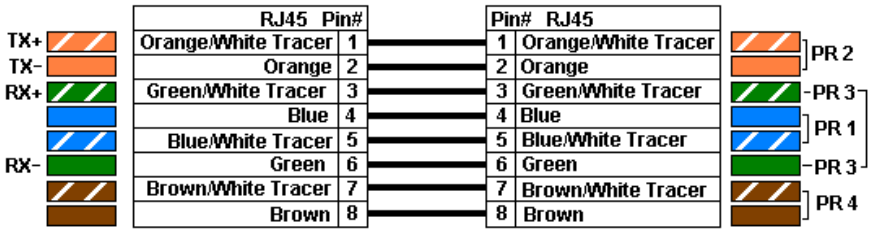

Color Standard
EIA/TIA T568B

Ethernet Crossover Cable

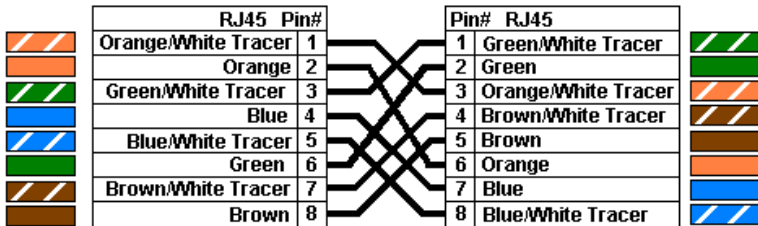


"B" is most recent


Common Ethernet Crossover Cables may only cross connect the Orange & Green pairs

2006.06.28


SFP Installation and Connection

The SFP module is terminated with LC connectors. For installation, the module needs to be adjusted so as to be aligned correctly and then moved into the SFP slot until a click is heard.

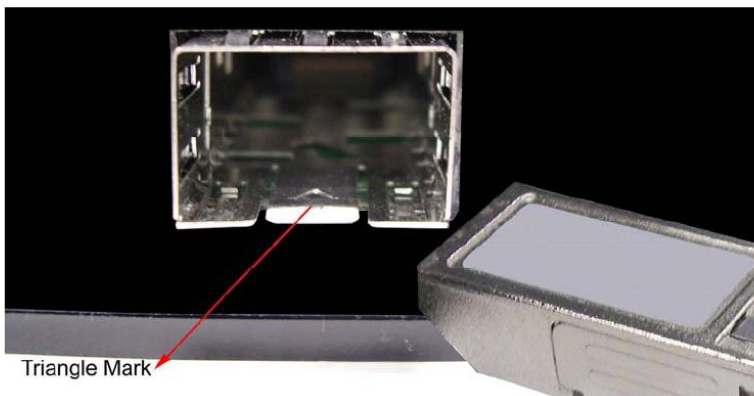

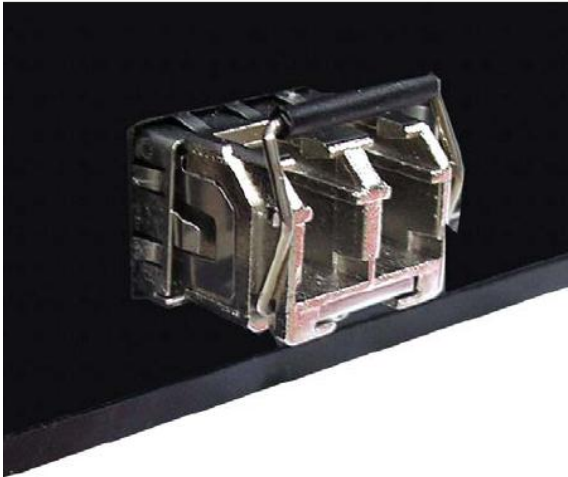


SFP Module Inserted

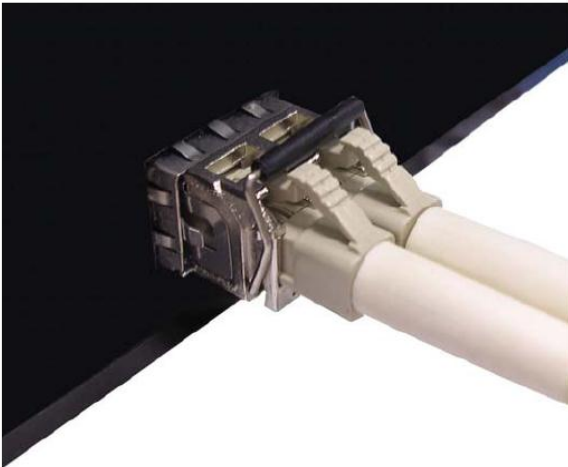

LC Fiber Cable Connection

To remove SFP modules lower removal bar and firmly pull transceiver out.

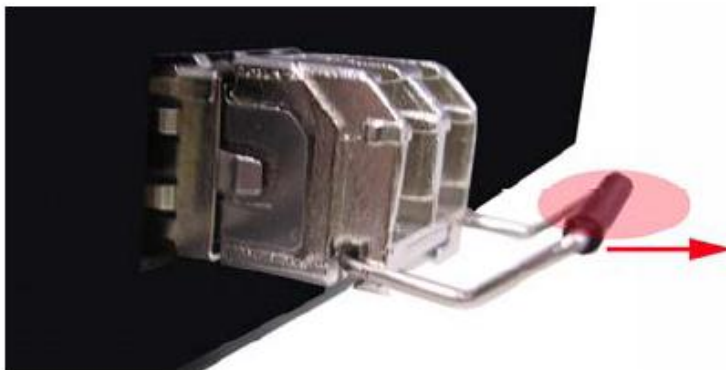

Cabling

Use unshielded twisted-pair (UTP) or shielded twisted-pair (STP) cable.

10Mbps: Category 3, 4, 5 or great cable

100Mbps: Category 5 or great cable

1000Mbps: Category 5e or great cable

Maximum cable length: 100 meters (328ft.)


100Base FX SC Fiber

The use of fiber optics has become prevalent in Industrial Ethernet network communication systems. Extending distance, high data rate capabilities, noise rejection and electrical isolation are just a few of the important characteristics that make fiber optic technology ideal for use in industrial applications.

Each fiber port has a TX (transmit) and RX (receive) connection fixed at 100Mbps speed. The fiber ports will support multi mode or single mode fiber dependent on the model number ordered.



Fiber connection illustration



Power Input Connections

The ESW626 series accepts 18V-36VDC input voltage using terminal blocks.

INPUT POWER
DC18-36V



+ FG -

Specifications

Power Requirements		
Voltage Range	18V-36VDC 25W MAX	
Connection		
	Terminal Block	
Protection	Reverse Polarity Protection	
RJ45 Ports		
	Shielded	
	10/ 100BaseT(X) auto-sensing	
	Full/Half Duplex	
	MDI /MDIX auto-Negotiate	
Multi Mode Fiber		
	100Base-FX	
Distance	2 km	

Wavelength	1310 nm	
Cable	62.5/125 um	
TX power	-23.5 to -14dbm	
RX Sensitivity	<-35dbm	
Connector Type	SC	
Single Mode Fiber		
	100Base-FX	
Distance	20 km	
Wavelength	1310 nm	
Cable	9/125 um	
TX power	-15 to -8dbm	
RX Sensitivity	<-35dbm	
Connector Type	SC	
SFP Ports		
Type	Mini-GBIC SFP Ports	
Connector Type	LC	
Metal Enclosure		
Material	Aluminum and Steel	
Rating	IP30	
Rack Mount		
Enclosure Dimensions(W×H×D)	443×44×220 mm	
IEEE Standards		
IEEE802.3	10Base-T	
IEEE802.3u	100BaseT(X), 100Base FX	
IEEE802.3ab	1000Base(X)	
IEEE802.3z	1000BaseSX/LX/LHX/ZX	
IEEE802.3x	Flow control	
Packet buffer	256k bytes	
MAC Address Size:	8 k	
Processing Type	Store and Forward	
Agency Approvals		
EMI	FCC Part 15, CISPR (EN55022)	
Generic Standard for Light Industrial Environments	Per EN61000-6-1	
EMC	EN61000-4-2 (ESD), level 2	Contact +/- 4kv
		Enclosure Air +/- 8kv

EMC	EN61000-4-3 (RS), level 2	3V/meter
EMC	EN61000-4-4 (EFT), level 2	
	Signal ports	+/- 0.5kV
	D.C. Power ports	+/- 1kV
	A.C. Power ports	NA
	Earth ground ports ³	NA
EMC	EN61000-4-5 (Surge), level 2	
	Signal ports	+/- 1kV
	D.C. Power ports	+/- 0.5kV
	A.C. Power ports	NA
EMC	EN61000-4-6 (CS), level 2	
	Signal ports	3 V rms
	D.C. Power ports	3 V rms
	A.C. Power ports	NA
	Earth ground ports ³	NA
Certifications		
Enclosure	IP30	
Certification	RoHS	
Op. Temperature	-10°C to 60°C or -40°C to 75°C (Wide Temperature Type)	
Storage Temperature	-40°C to 85°C	
Ambient Relative Humidity	5 to 95% (Non-condensing)	
MTBF	200,000h	