





Dimensions mm[inch]
 tolerances acc. to DIN ISO 2768-m
 Toleranzen gem. DIN ISO 2768-m

Isometric
 Scale 1:2
 Maßstab 1:2

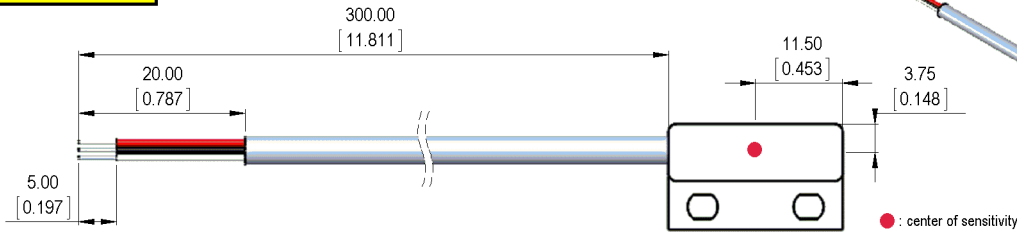

Housing

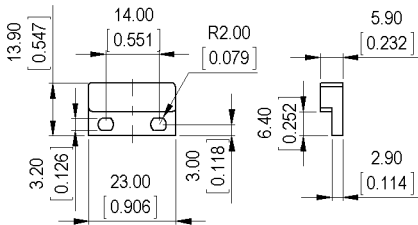


Cable
 round cable UL/CSA LIYY AWG 26, grey
 color of wires: red, black, white

Terminals/Connector

Ends tinned
 red: V_{CC}
 black: Ground
 white: Output


Typical External Circuit



Add external pull-up resistor (R_{PU}) for sinking output between V_{CC} and Output
 Add external bypass capacitor (C_{BYP}) close to the sensor to reduce external noise as needed

Marking

according to EN60062/factory code
 gem. EN60062/Fertigungsstätte



Magnetic properties	Conditions	Min	Typ	Max	Unit
Hall Type				Latch	
Operation				Bipolar	
Output On	T=25C and VDD=12V		22		Gauss
Output Off	T=25C and VDD=12V		-23		Gauss
Hysteresis	T=25C and VDD=12V		45		Gauss

Technical data	Conditions	Min	Typ	Max	Unit
Supply voltage		3		24	VDC
Supply current				4	mA
Operating temperature range		-40		85	°C
Storage temperature		-60		105	°C

Cable specification	Conditions	Min	Typ	Max	Unit
Cable type				round cable	
Strand number			3		
Structure of strands			AWG 26	7x0,16	
Insulation single strands				PVC	
Strands color				red, black, white	
Insulation cable sheath				PVC	
Sheath color	DIN 47100			grey	
Outer diameter of a cable jacket			3.8		mm

General data	Conditions	Min	Typ	Max	Unit
Tightening torque	Screw M3 ISO 1207 Disk ISO 7089			0.5	Nm
Mounting advice		decreased switching distances when mounted near iron			
Mounting advice		magnetically conductive screws must not be used			
Case color		white			
Sealing compound		Polyurethan			
Remark		direct custom inquiries to sales@standexmeder.com			