1.2 IMPEDANCE: 50 OHMS, NOM.

1.3 VSWR (MAX):

0.1 TO 8.0 GHz: 1.20:1 8.0 TO 12.4 GHz: 1.25:1 12.4 TO 18.0 GHz: 1.35:1

1.4 INSERTION LOSS: 0.45dB MAX.

OVER FREQ. RANGE AT 1KHz > 65dB

1.5 OPERATING TEMPERATURE: -20°C TO +100°C

1.6 DC WORKING VOLTAGE: 200 VOLTS


1.7 TYPE: INSIDE/OUTSIDE

2.0 MARKING:

MARK UNIT AS SHOWN.

(REF.: INK-02597-27-06)

3.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

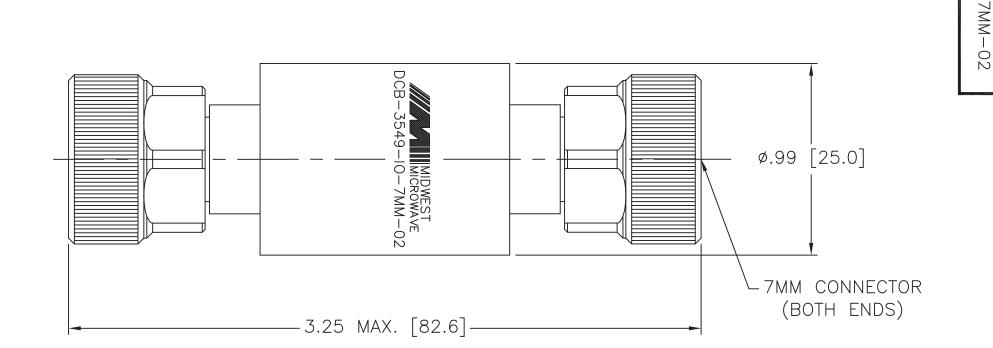

DWG NO. WAS: 02707-01-00

NOTICE: The information contained in this drawing is proprietary and must not be used without the TITLEBLOCK permission of Cinch DESCRIPTION Connectivity Solutions. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES RE-DRAWN AND TOLERANCES ARE: ADDED 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. _ B1 CONCENTRICITY: T.I.R. _ $_{\Omega}$ ANGLES AND PERPENDICULARITY: ±1°

34078 MIDWEST MICROWAVE

TITLE

DC BLOCK
OUTLINE DRAWING
a bel group

DRAWING NUMBER

DCB-3549-IO-7MM-02-01

REV.

В1

DCB-3549-IO-

NUMBER

SCALE: 2=1 SHEET 1 of