

Clip, 5 x 20 mm, Version 1



500 V · 10 A (UL/CSA)



**Description**

- Through hole mounting
- Tape & Reel for automatic pick & place

**Approvals**

- UL File Number: E39328

**Weblinks**

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


**Technical Data**

Fuse-Link	5 x 20 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	500 V (UL/CSA)
Rated current	10 A (UL/CSA)
Admissible Ambient Air Temp.	-40 °C to 90 °C
Material: Terminals	see variants
Unit Weight	0.32 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	none

Soldering Methods	Wave <a href="#">Soldering Profile</a>
Solderability	245 °C / 3 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< 10 mΩ at 20 mV

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimension**

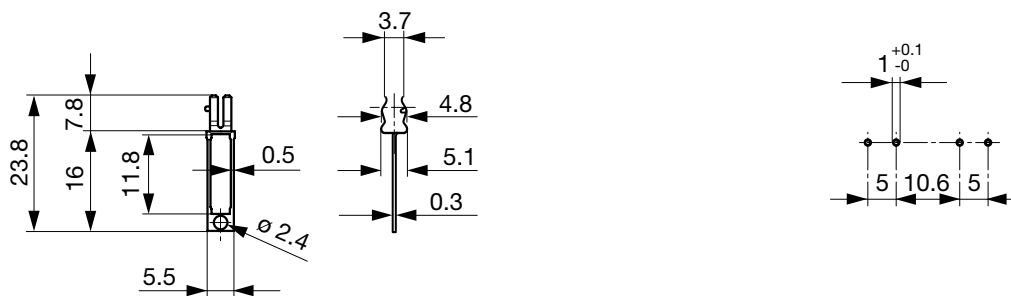

Drilling diagram

**All Variants**

Clip	Terminal	Material: Terminals	Order Number
●	straight	Silver-Plated Bronze	0752.1242
●	straight	Nickel-Plated Bronze	0752.1243

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging Unit**      Taped reeled (1000 pcs.)

---