


Gecko Screw-Lok Connectors

Female Crimp Contacts – Pre-Crimped Wires

- ❖ 4-finger Beryllium Copper contact.
- ❖ Ready for assembling to housing.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ For non-standard cable lengths, please contact cables@harwin.com with your requirements.

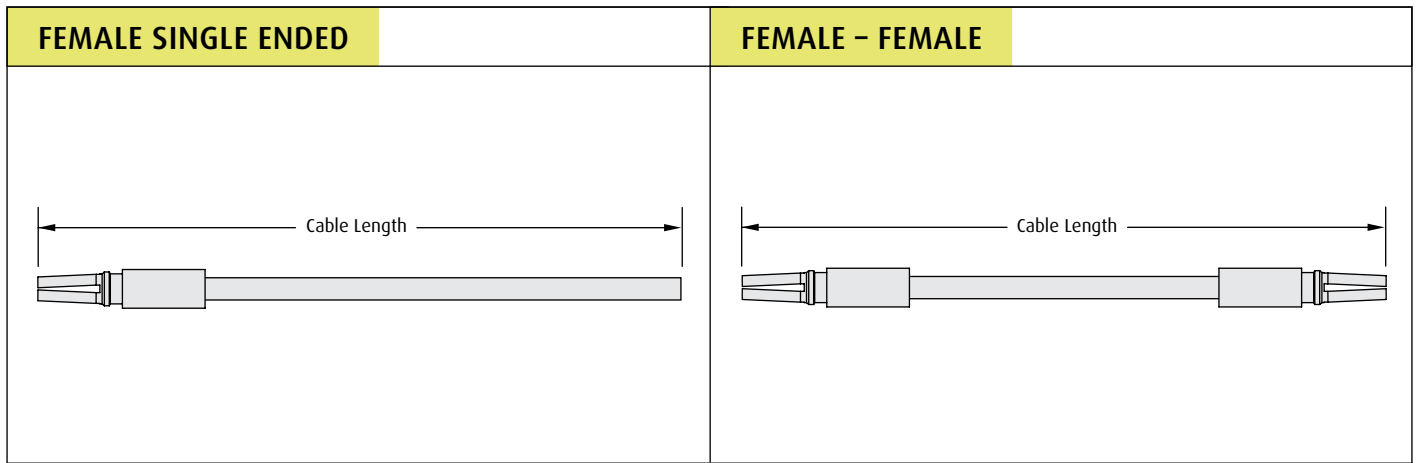


TOOLS

Contact Insertion/Removal Tool – Z125-902

- ❖ Female crimp housing and loose contacts shown on previous pages.
- ❖ Instruction sheets available at www.harwin.com/instructions.

HOW TO ORDER

G125 – F WX XXXX X 94

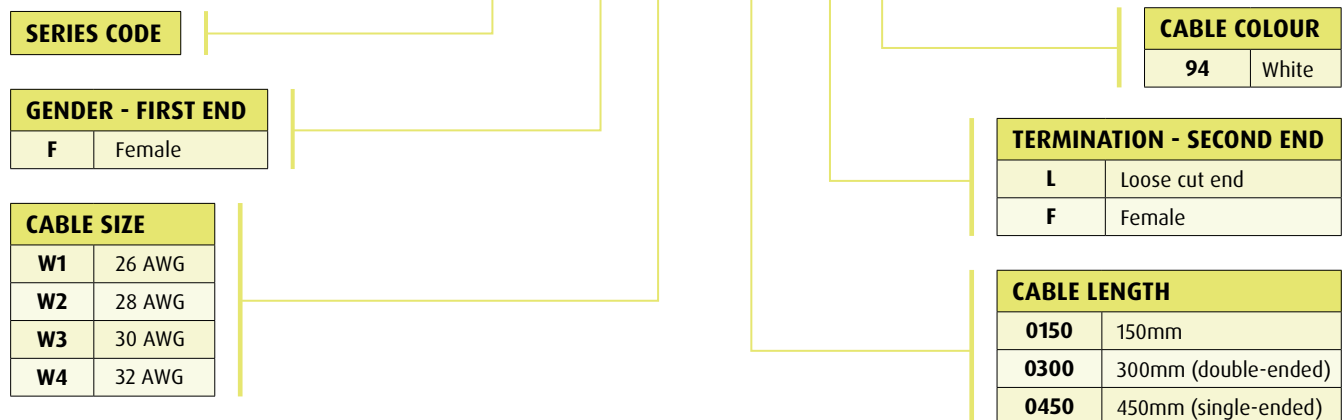

All dimensions in mm.

Patent Published