
Manuals

Manual Switches Rocker Switch Operators

COLOR DISPLAY OPTIONS



Rocker operators are assembled to the switches by simply snapping them into recesses in the switch operator sockets.


Transmitted color — Color is displayed whether lamp is On or Off. Choice of 1piece rockers (types 10 or 20) or rockers with clear cap and colored translucent insert (types 11 or 12).

Dead front hidden color/hidden legend — Rocker appears black with lamp Off. Legend and color appear when illuminated (types 30 or 40).

Projected color — Translucent white rocker with transparent colored insert (types 50 or 60). White rocker appears colored when illuminated.

AML54 ROCKER OPERATOR ORDER GUIDE (All possible color combinations may not be available.)

For AML14, AML24, AML34 incandescent or non-lighted display.

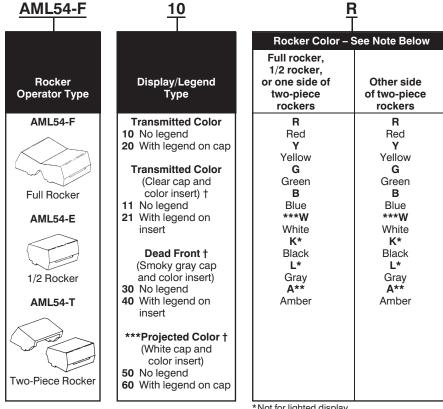

NOTE: AML54-F10 and AML54-F20 are one-piece, one-color full rockers. Thus only one color code letter is necessary when ordering. Include a two letter code for all other AML54-E (and AML54-T) catalog listings.


- *Not for lighted display.
 **Not available with projected color or dead
- Insert is clear for projected color when "W"
- †Not available for use with AML34 power switches.

Example: AML54-F10R

Full rocker; with transmitted color, no legend; red.

AML56 ROCKER OPERATOR ORDER GUIDE

For AML36 neon display.

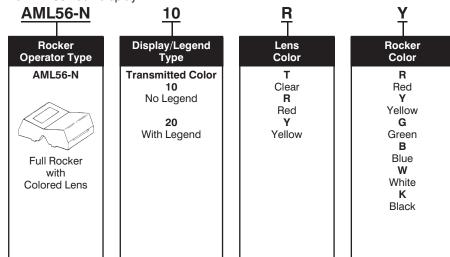

AML56-N rockers have a colored lenticular lens window which extends over the neon lamp.


Example: AML56-N10RY

Full rocker; with transmitted color, no legend; yellow rocker and red lens.

Rocker Switch Operators

AML56 ORDER GUIDE

For AML16 and AML26 LED display.

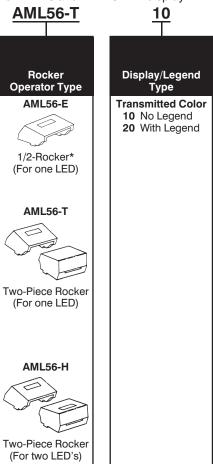

Example: AML56-T10RB

Two-piece rocker; with LED window in one side, transmitted color, no legend; red (LED side) and blue (non-LED side).

R T	<u>В</u> Т
Rocker Color –	See Notes Below
1/2-rocker or LED side of two-piece rockers	Other side of two piece rockers
R Red Y Yellow G Green B Blue W White K Black L Gray	R Red Y Yellow G Green B Blue W White K Black L Gray

- * Notes:
- ¹ Only one color code letter is necessary for AML56-E 1/2-rockers. AML56-E, -T, and -H rockers have an open window which allows LEDs to be flush with the rocker surface.
- ² To order a 1/2-rocker without the LED "window," specify an AML54-E listing from the previous page.

HOW TO ORDER ROCKER LEGENDS

When specifying legended rockers, submit a legend order sheet to cover each catalog listing. These forms identify the maximum number of lines per area and the maximum characters per line, based on the type size you request. To insure proper legend orientation, rocker switch housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP or to the LEFT.

Rocker legend order sheets are shown on the following pages. Reproduce them on your office copier.

Legend Sheet	Form No.
AML54 Rockers	FO-63566
AML56 Rockers	FO-63564

Honeywell

త

ж 8

11 @

×

+1

Modified Gothic

AVAILABLE

= ·ŀ

Fig. "B"

Customer Dwg. No

Schedule No.

Manuals

For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the"LEFT" on NOTE: Use this area to show special Legend Locations or Configurations NOT shown below. NON-STANDARD legends will involve addition charges and increased delivery time. ← CR1/41/23/4 1/3 2/3 SPECIAL LEGENDS Please use black ink in filling out this form to help us process your order. Modified Gothic lettering (A thru Z). numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, STANDARD SYMBOLS + ٥. Fill in appropriate catalog listing - one listing/sheet. Check proper figure #. Type size, Type color. Fill in quantity required. 0 Fig. "A" % 13/64 and 5/16. .. **→** # Indicate legends desired — Do not exceed maximums shown in legend order guide. ← Line Number ÷ ₩ 2nd Line rectangular devices. MICRO SWITCH Sales Order ustomer P.O. No. Customer: Catalog Listing AML54 -Address: Sequence: Left-to-Right or Top-to=Bottom 1st Line 5/16 9/64 13/64 2nd Line Max Characters/Line N All legends will be centered within the legendable areas. က AML Rocker Legend Sheet/Product Specification က (Date) Transmitted Color-Legend on outer shell (Button 2. Dead Front—Legend on insert 3. Projected Color - Legend on outer shell (Button) 4. Transmitted color with clear cap legend on insert. 5. All legends will be centered within the legendable Area 1 5 7/64 4 LEGEND ORDER CHART 2 S 1st Line 5/64 5 S Ŋ S Legend Order Guide But-ton Oty 5/16 Ink Color Black White 13/64 Max Lines/Area Black 9/64 Type Size 5/64 | 7/64 | 9/64 | 13/64 | 5/16 7/64 2 N 5/64 2 N Standard Legend Placement ิณ a **Jse Special Legends Section** Account NO 126-284 Figure ž *NOT AVAILABLE WITH AML 34 SERIES 2 3 4 lor other placements. 윤원 ш **Button Type** Orientation Customer Part No FO-63566-F _ A3RA|A3RA|A3RA

			Customer Dwg. No.	Line Number Schedule No.			(city) (state) 1. Fill in appropriate catalog listing - one listing/sheet. 2. Check proper figure #. Type size, Type color. 3. Fill in quantity required - Do not exceed 4. Indicate legends desired — Do not exceed maximums shown in legend order guide.	ote 1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices. 2. Please use black ink in filling out this form to help us process your order.	SPECIAL LEGENDS NOTE: Its this great to show executed Located Locations or Configuration	NO.15. Use this area to show special Legend Locations of Contigurations NOT shown below. NON-STANDARD legends will involve additional charges and increased delivery time.				Fig. "A" Fig. "B"	Modified Gothic lettering (A thru Z).	below available in 5/64, 7/64, 9/64, 13/64 and 5/16. Modified Gothic	DARD SYMBOLS AVA	8 * () /	V A H H + + + + + + + + + + + + + + + + +	→ ← ← C _R 1/41/23/41/3 2/3 @ ∞
		ting —	.O. No.	MICRO SWITCH Sales Order	ner:	:52	(eity) Fill in appropriate catalog listing - one listing/ Check proper figure #. Type size, Type color, Fill in quantity required. Indicate legends desired — Do not exceed maximums shown in legend order guide.	For Proper Legend Orients have "MICRO SWITCH" lo rectangular devices. Please use black ink in filli				Area 2	m 2nd Line							
		Catalog Listing AML56 -	Customer P.O. No	MICRO SWI	Customer:	Address:	Instructions 1. Fill in a 2. Check 3. Fill in q 4. Indicate	Note 1. For F have recta				Ar	Sequence: Left-to-Right or Top-to=Bottom 2nd Line 1st Line							
			5/16	0	0	0	7-7-					Н	Right or		\parallel	+				1
_			9/64 13/64	က	က	8	6 E			areas.			e: Left-to- 2nd Line							
atio			aracter 9/64	2	5	5	2 2		1	dable [Area 1	squence. 2							(Date)
ific			Max Characters/Line	c)	5	5	2 2		1	e legen	IART	Ar								
Spec	of	ø	5/64	1	7	7				ered within the legendable <u>areas.</u>	LEGEND ORDER CHART		1st Line							
luct		Guide				THE THE				ntered	END 0	But-	g g						+	
٢٥٥	Page_	Order	5/16	1	0	00	7-			pe cel	LEG		White							(Signature)
et/I		Legend Order	Lines/Area 9/64 13/64	0	0	0	7			 All legends will be cent 		Ink Color	Black White							T S
She		Le	~	1	-	-	2 - 4			II leger			5/16]
bu 6			12	1	-		2 - 2					Ze	13/64			_	_		1	
eg(5/64	-	-		20 -0			nent –		Type Size	/64 9/6 		H	+	-		+	-
er I	126-284		Figure	-	2	က	4 10			Placen Is Sectit		ľ	5/64 7/			1			+	1
lock) 126			Ш	Ш	エ	z⊢			egend Legend ements		Fig								
AML Rocker Legend Sheet/Product Specification	Account NO		Button Type Orientation	ABRA 1	A BRA	ABRA 2 1				Standard Legend Placement Use Special Legends Section for other placements.		Customer	Part No							FO-88664-E