

Contact insert module - HC-M-01-AT-M-40-PE - 1417382


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert module, Number of positions: PE, Pin, Axial screw connection, 200 A, 25 mm² ... 70 mm², Application: PE transmission



Key Commercial Data

Packing unit	2 STK
Minimum order quantity	2 STK
GTIN	 4 055626 112633
GTIN	4055626112633

Technical data

Dimensions

Height	54.6 mm
Width	34.4 mm
Length	29.3 mm

Electrical characteristics

Note	For HEAVYCON HC-B6 to B48 housing (housing height: min. 72 mm), HC-M-MHR... hinged retaining frame required, axial connection for 5 mm Allen key
Rated current	200 A
Connection profile	PE

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	25 mm ² ... 70 mm ² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	3 ... 00
Stripping length of the individual wire	16 mm

Contact insert module - HC-M-01-AT-M-40-PE - 1417382

Technical data

Mechanical characteristics

Tightening torque	8 Nm (25 mm ² ... 70 mm ²)
	9 Nm (70 mm ²)
Wire diameter including insulation	12 mm (25 mm ²)
	16 mm (40 mm ²)
Hexagonal socket	WAF 5
Insertion/withdrawal cycles	≥ 500
Minimum housing height	72 mm

General

Series	HC-M-HS
Color	light gray
Number of module slots	2
Connection method	Axial screw connection
Flammability rating according to UL 94	V0
Assembly instructions	<ul style="list-style-type: none"> - Use only flexible conductors, - Connection of wires with 5 mm an Allen wrench, - Housing height h ≥ 72 mm, - Connectors may only be operated without load/voltage.
Connection	<p>Note on axial connection technology: Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used. Use of cables with a geometric cross section that differs greatly from the nominal cross section of the cable should be checked before use. The wiring space for axial screw technology is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) should be checked before use.</p> <p>Assembly instructions Before assembly, ensure that the tapered screw is turned back all the way (chamber is open). The cables must not be twisted. The wires should be inserted as far as they will go into the contact chamber (until the insulation touches the contact). Hold the wires in position and use the socket wrench to tighten. The used wire end should be cut off before connecting again. The connection screw may only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable should be mechanically intercepted at an appropriate distance from the connection point (e.g., by using a plate cutout). DIN VDE 0100-520:2003-06 contains information on how to do this correctly. The module cannot be used simultaneously with HC-B..-TMB-SD-IP65 and HC-B..-TMS-SD-IP65 protective covers.</p> <p>PE mounting plate The PE plate must be pressed hard against the swing frame using the 4 screws. First loosen the 4 screws of the PE plate and then tighten them again once the module is fixed in the swing frame.</p>

Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC


Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Contact insert module - HC-M-01-AT-M-40-PE - 1417382


Drawings

Dimensional drawing

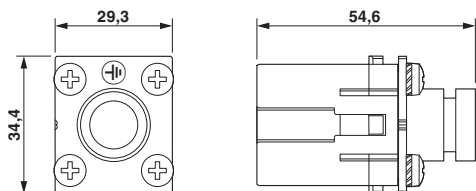


Male insert

Diagram

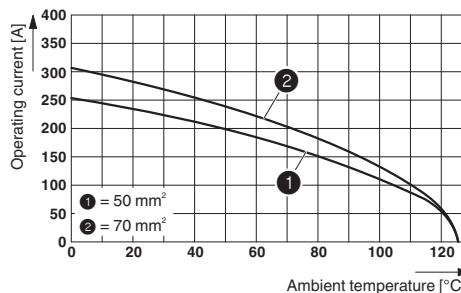


Three modules in B24 housing

Diagram

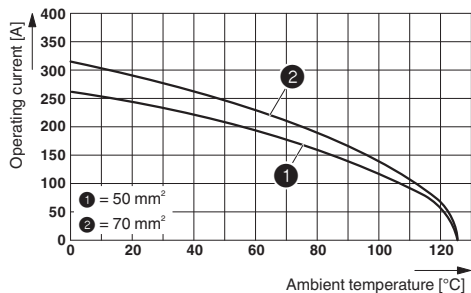

Schematic diagram

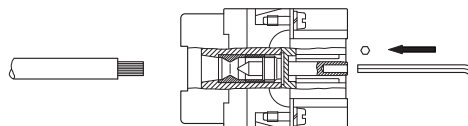

Axial screw connection

Two modules in B24 housing

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	--	---------------------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>