

**Specification Status: Released**

**Operating Conditions at 20°C:**

Maximum Continuous Operating Voltage ( $V_{MCO}$ ): 60V<sub>DC</sub>  
Maximum Interrupt Current ( $I_{INT}$ ): 3A<sub>RMS</sub>

**Fault Ratings at 20°C:**

250 V<sub>RMS</sub>, 3A, 10 applications

**Additional Info at 20°C:**

- Resistance matched: 0.5 Ohm
- Lightning withstand: 1.5 kV per ITU-T K.20, K.21
- Helps equipment meet ITU-T K.20, K.21 Recommendations
- Helps equipment meet Telcordia GR1089 intrabuilding requirements



**Lead Material:**

22 AWG Sn-Plated Copper (0.64 mm [0.025"] nominal diameter)

**External Coating Material:**

Cured, flame retardant epoxy polymer, meeting UL94 V-0 requirements

**Marking:**

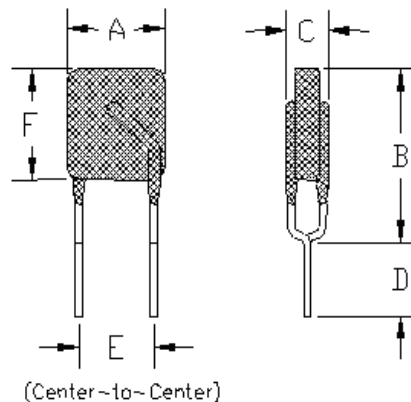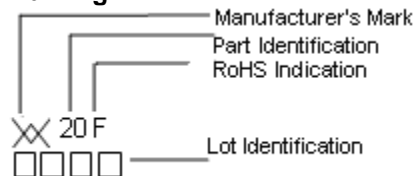

**TABLE I. DIMENSIONS:**

mm:	A		B		C		D		E	F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	NOM	MAX
	--	6.5	--	11.0	--	4.6	4.7	--	5.0	7.0
in:*	--	(0.26)	--	(0.43)	--	(0.18)	(0.19)	--	(0.20)	(0.28)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS @ 20°C:**

HOLD CURRENT (A)	TRIP CURRENT (A)	RESISTANCE (Ω)			TIME TO TRIP(Sec) @ 1A	OPERATING TEMPERATURE (°C)		TRIPPED POWER DISSIPATION (W) @ 60V <sub>DC</sub>	
		R MIN	R MAX	R <sub>1 MAX</sub> *		TYP	MIN	MAX	TYP
0.120	0.240	8.5	10.8	16.0	0.75	-40	85	0.8	0.9

\*Maximum device resistance at 20°C measured 1 hour post trip

**TABLE III. APPLICABLE PART DESCRIPTIONS:**

PART DESCRIPTION	PACKAGING TYPE	NOTES
TRF250-120T-RG-B-0.5	Bulk	N/A

Agency Recognitions:  
Reference Documents:  
Precedence:  
Effectivity:  
CAUTION:

UL (File #E74889), CSA (File #78165), TUV PS300, ITU-T K.20, K.21  
This specification takes precedence over documents referenced herein  
Reference documents shall be the issue in effect on the date of invitation for bid  
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame

**Materials Information**

ROHS Compliant

ELV Compliant

Pb-Free



OBSOLETE  
NOT the LATEST  
REVISION