

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	DCN 43165	03/17	MAL	

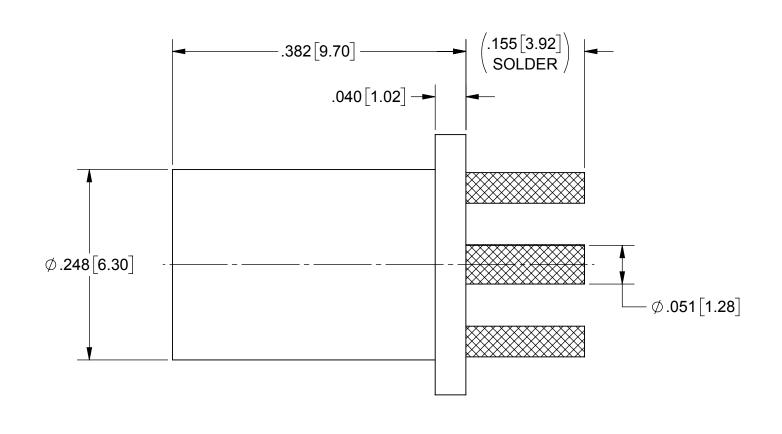

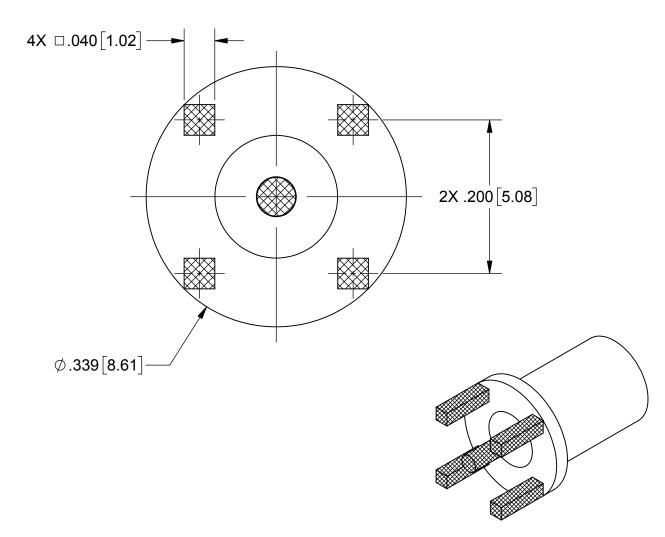

MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,

ALLOY UNS S30300, TYPE 1

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY& CONTACT: GOLD PER ASTM B488, TYPE II,

CODE C, CLASS 0.76; OVER NICKEL

PER AMS-QQ-N-290, CLASS 1, .000050" MIN

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 2.0 GHz

NOTES:

- 1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800)
- 2. TO BE TIN DIPPED USING Sn96 SOLDER
- 3. ALL DIMENSIONS APPLY PRIOR TO SOLDER DIPPING

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

BZ BOARD MOUNT JACK

8821-60021-TD

SHEET 1 OF 1

SIZE CAGE CODE DWG. NO B 95077

SCALE: 4:1

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 151 & LAST THREADS.	
FINISH:	SEE NOTES	X°X' ±15' DECIMAL: .X ±.030 .XX ±.010		
SURFACE AREA: N/A		.XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES	5) SURFACE ROUGHNESS 63 MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		PER ASME Y14.5M - 1994	7) REMOVE ALL BURRS	
		THIRD ANGLE PROJECTION	DRAWN: VB 03/03/17	
		⊕ €∃	CHECKED: MAL 03/03/17	
			APPROVED: MAL 03/03/17	