
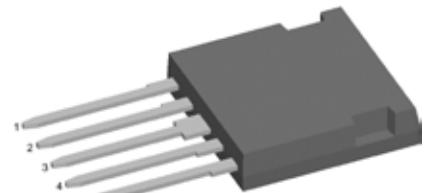


## IGBT Boost Chopper

in ISOPLUS i4-PAC™

$I_{C25}$  = 65 A  
 $V_{CES}$  = 600 V  
 $V_{CE(sat)}$  typ. = 1.6 V



E72873

## IGBT

Symbol	Conditions	Maximum Ratings		
$V_{CES}$	$T_{VJ} = 25^\circ\text{C}$ to $150^\circ\text{C}$	600		V
$V_{GES}$		$\pm 20$		V
$I_{C25}$	$T_C = 25^\circ\text{C}$	65		A
$I_{C90}$	$T_C = 90^\circ\text{C}$	40		A
$I_{CM}$	$V_{GE} = \pm 15 \text{ V}$ ; $R_G = 22 \Omega$ ; $T_{VJ} = 125^\circ\text{C}$	100		A
$V_{CEK}$	<b>RBSOA</b> Clamped inductive load; $L = 100 \mu\text{H}$		$V_{CES}$	
$t_{SC}$ <b>(SCSOA)</b>	$V_{CE} = V_{CES}$ ; $V_{GE} = \pm 15 \text{ V}$ ; $R_G = 22 \Omega$ $T_{VJ} = 125^\circ\text{C}$ ; non-repetitive	10		$\mu\text{s}$
$P_{tot}$	$T_C = 25^\circ\text{C}$	200		W

## Symbol Conditions

(T<sub>VJ</sub> = 25°C, unless otherwise specified)

		min.	typ.	max.	
$V_{CE(sat)}$	$I_C = 30 \text{ A}$ ; $V_{GE} = 15 \text{ V}$ $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.6 1.8	2.0	V
$V_{GE(th)}$	$I_C = 1 \text{ mA}$ ; $V_{GE} = V_{CE}$	4.5		6.5	V
$I_{CES}$	$V_{CE} = V_{CES}$ ; $V_{GE} = 0 \text{ V}$ $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.1 0.1	mA mA	
$I_{GES}$	$V_{CE} = 0 \text{ V}$ ; $V_{GE} = \pm 20 \text{ V}$			200	nA
$t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $E_{on}$ $E_{off}$	Inductive load $V_{CE} = 300 \text{ V}$ ; $I_C = 30 \text{ A}$ $V_{GE} = \pm 15 \text{ V}$ ; $R_G = 22 \Omega$		50 60 300 30 1.0 1.4		ns ns ns ns mJ mJ
$C_{ies}$	$V_{CE} = 25 \text{ V}$ ; $V_{GE} = 0 \text{ V}$ ; $f = 1 \text{ MHz}$		2.8		nF
$Q_{Gon}$	$V_{CE} = 300 \text{ V}$ ; $V_{GE} = 15 \text{ V}$ ; $I_C = 50 \text{ A}$		120		nC
$R_{thJC}$ $R_{thJH}$	with heatsink compound			0.6 1.2	K/W K/W

## Features

- NPT IGBT technology
  - low saturation voltage with positive temperature coefficient
  - fast switching
  - wide safe operating area
- HiPerFRED™ diode
  - fast reverse recovery
  - low operating forward voltage
  - low leakage current
- ISOPLUS i4-PAC™ package
  - isolated back surface
  - low coupling capacity between pins and heatsink
  - enlarged creepage towards heatsink
  - application friendly pinout
  - low inductive current path
  - high reliability
  - industry standard outline
  - UL registered E 72873

## Applications

- medium frequency power supplies
  - boost chopper for power factor correction
  - transformer primary switch
- drives: supply of
  - switched reluctance machines
  - armature or excitation winding of DC machines
  - excitation winding of synchronous machines

**Diode**

Symbol	Conditions	Maximum Ratings		
$V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ to $150^\circ\text{C}$	600	V	
$I_{F25}$	$T_C = 25^\circ\text{C}$	52	A	
$I_{F90}$	$T_C = 90^\circ\text{C}$	31	A	

**Symbol**    **Conditions**


Symbol	Conditions	Characteristic Values			
		min.	typ.	max.	
$V_F$	$I_F = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.2 1.5	2.6	V
$I_R$	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.3 0.3	mA	mA
$I_{RM}$ $t_{rr}$	$\left. \begin{array}{l} I_F = 30 \text{ A}; dI_F/dt = -500 \text{ A}/\mu\text{s}; \\ V_R = 300 \text{ V}; V_{GE} = 0 \text{ V}; \end{array} \right\} T_{VJ} = 125^\circ\text{C}$		15 70	A ns	
$R_{thJC}$ $R_{thJH}$	with heatsink compound		2.6	1.3	K/W K/W

**Component**

Symbol	Conditions	Maximum Ratings		
$T_{VJ}$	operating	-55...+150	°C	
$T_{stg}$		-55...+125	°C	
$V_{ISOL}$	$I_{ISOL} \leq 1 \text{ mA}$ ; 50/60 Hz; $t = 1 \text{ s}$	2500	V~	
$F_c$	Mounting force with clip	20...120	Nm	

**Symbol**    **Conditions**

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$C_p$	coupling capacity between shorted pins and mounting tab in the case		40	pF
$d_s, d_A$	pin - pin	1.7		mm
$d_s, d_A$	pin - backside metal	5.5		mm
<b>Weight</b>			6	g

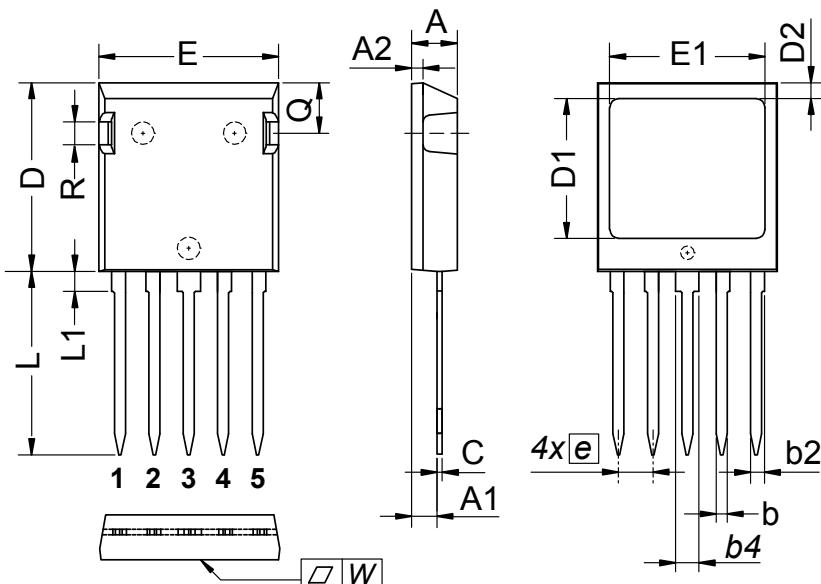

DIM.	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
C	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.15 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	—	0.10	—	0.004

Die konvexe Form des Substrates ist typ. < 0.05 mm über der Kunststoffoberfläche der Bauteilunterseite

The convex bow of substrate is typ. < 0.05 mm over plastic surface level of device bottom side

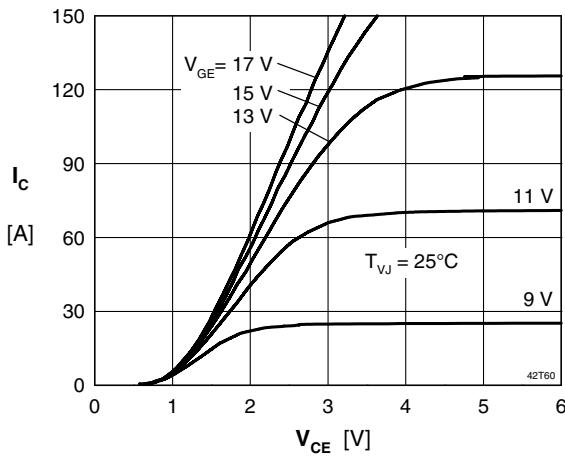


Fig. 1 Typ. output characteristics

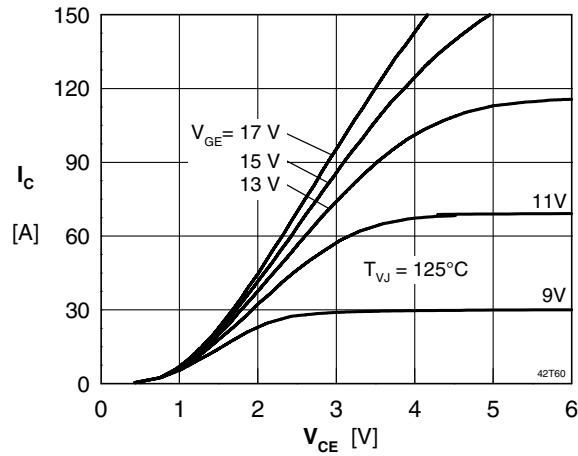


Fig. 2 Typ. output characteristics

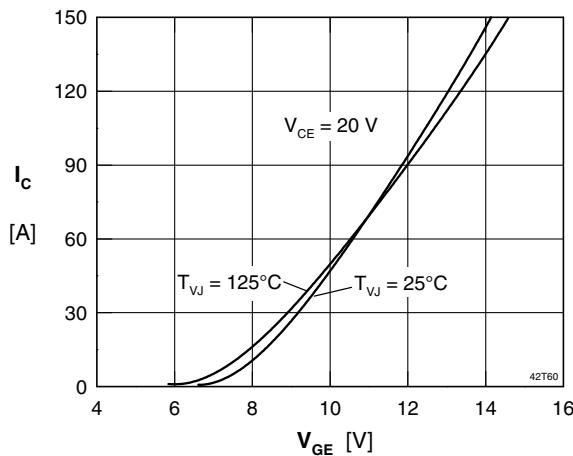


Fig. 3 Typ. transfer characteristics

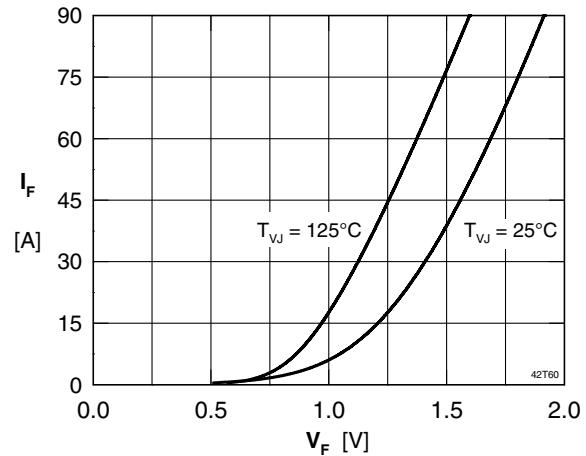


Fig. 4 Typ. forward characteristics of free wheeling diode

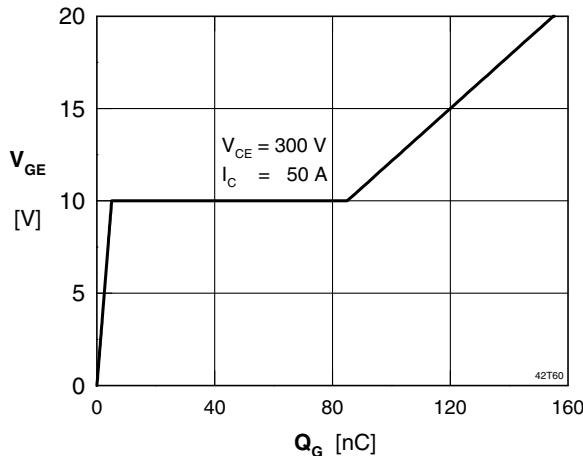


Fig. 5 Typ. turn on gate charge

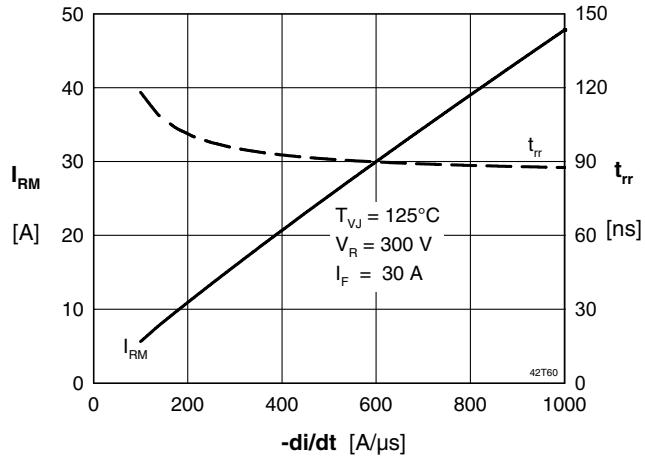


Fig. 6 Typ. turn off characteristics of free wheeling diode

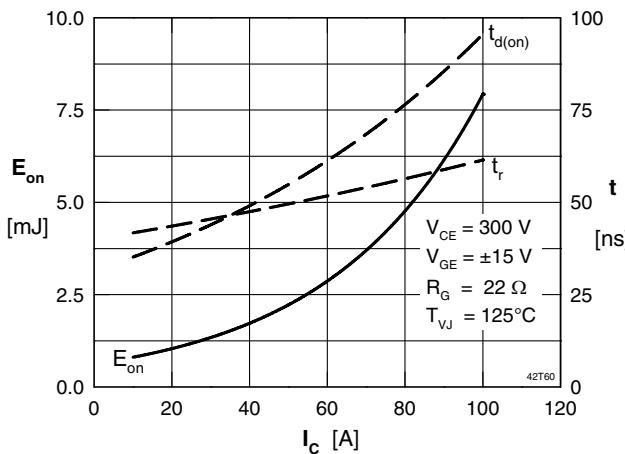


Fig. 7 Typ. turn on energy and switching

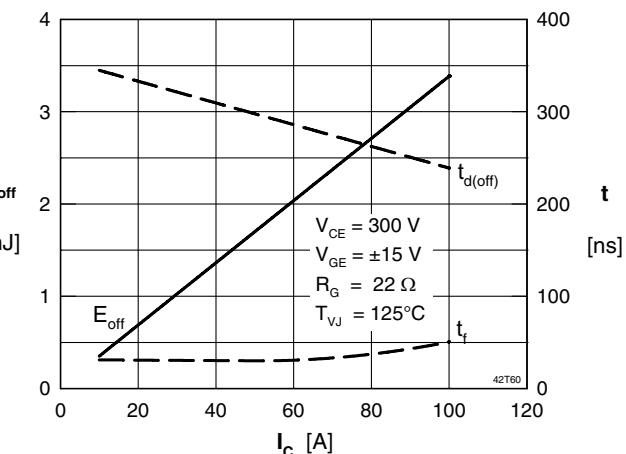


Fig. 8 Typ. turn off energy and switching times versus collector current

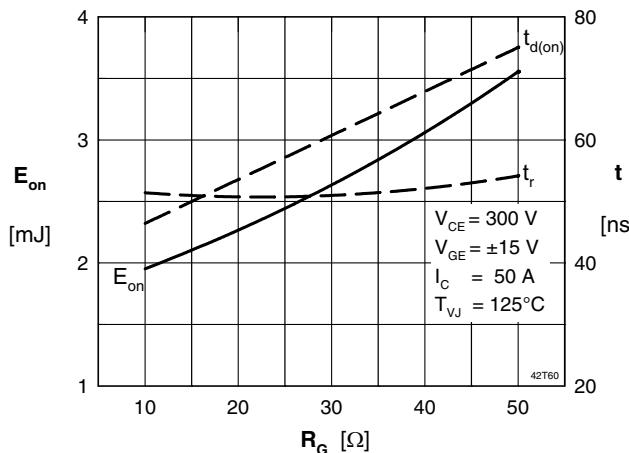


Fig. 9 Typ. turn on energy and switching

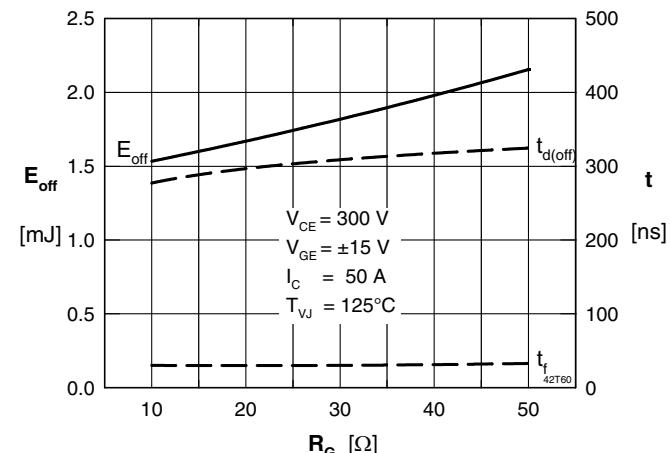


Fig. 10 Typ. turn off energy and switching times versus gate resistor

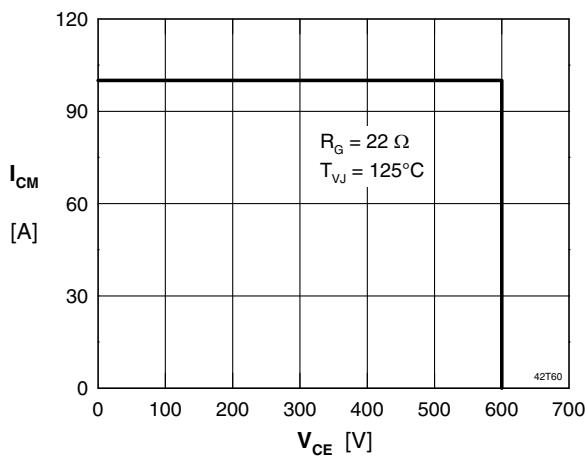


Fig. 11 Reverse biased safe operating area

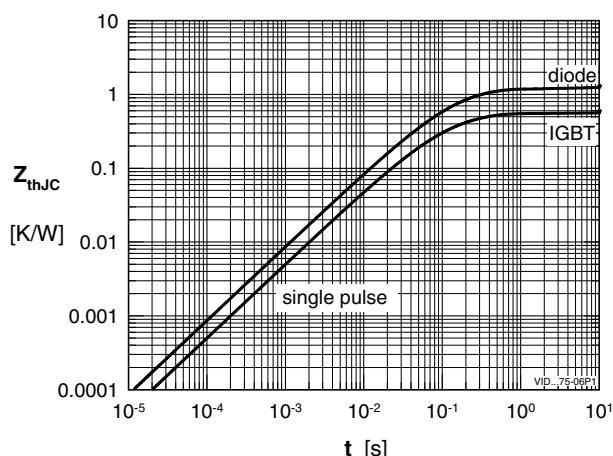


Fig. 12 Typ. transient thermal impedance RBSOA