

1

2


3

4


5

6

7

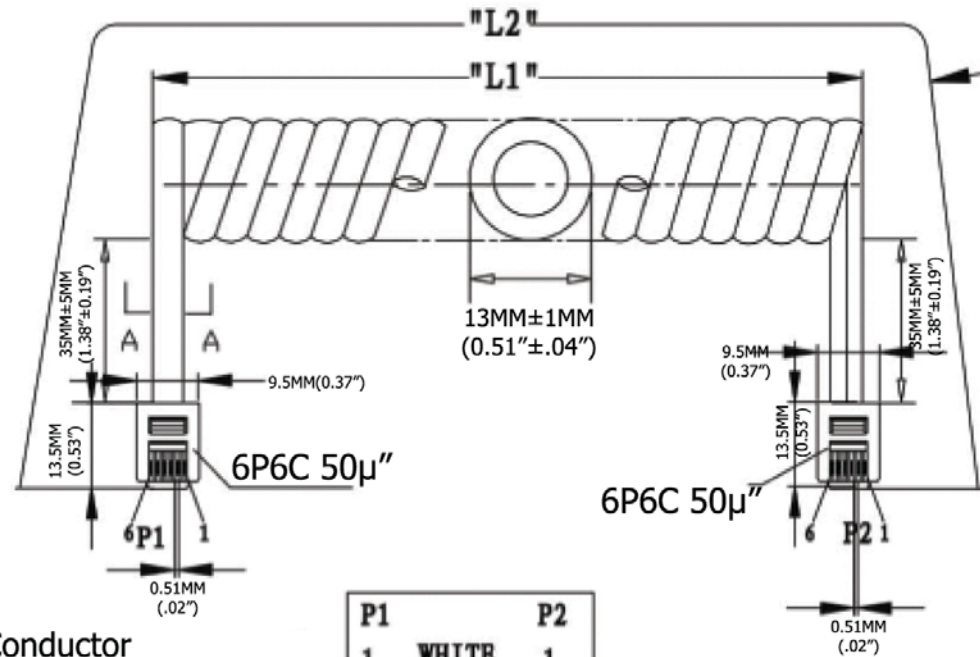

Extended length is with 500g of force

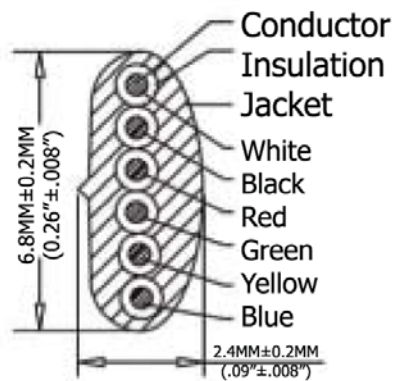

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36\"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ\" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	53.5 Inches
4,267.2MM-4,907.28MM	1,358.9MM

SBC: A-A

Scale	1:1					Name	Item No.	
TOLERANCE				Drawn	11.02.11	Chappell	AT-C-26-6/6/B-14/R	
X.X	±0.40			Approved				
X.XX	±0.25						Title	NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Reverse Plug, 50µ\" of contact plating, BLACK
X.XXX	±0.15						Drawing No.	
Angle	±3°							rev00
Modification				Date	Name	Replace		
						Sheet		



1

2

3

4

5

6

7