


DATA SHEET CL-L104-HC6N1-F5



CITIZEN and CITIZEN are trademarks or registered trademarks of CITIZEN HOLDINGS CO., LTD. JAPAN.

Ref.CE-P2389 03/13 R1(0613)

DATA SHEET		1/11
1. Scope of Application This data sheet is applied to the chip type LED lamp , mo	odel CL-L104-HC6N1	I-F5.
2. Part code		
CL- <u>L104</u> - <u>H</u>	<u>C 6 N 1</u> - F	5
Series L104 : White power LED for general lighting.		
Special specifications H : General Color Rendering Index Min.90 type.	».	
Watt class C6 : 6 watt package.		
Lighting color N1 : Compliance with ANSI C78.377-2008, 3-Step MacAdam ellipse, Correlated Color Temperature 5000K.		
C .	Symbol C	CITILED
	1	04-HC6N1-F5
	ITIZEN ELECTRONI	

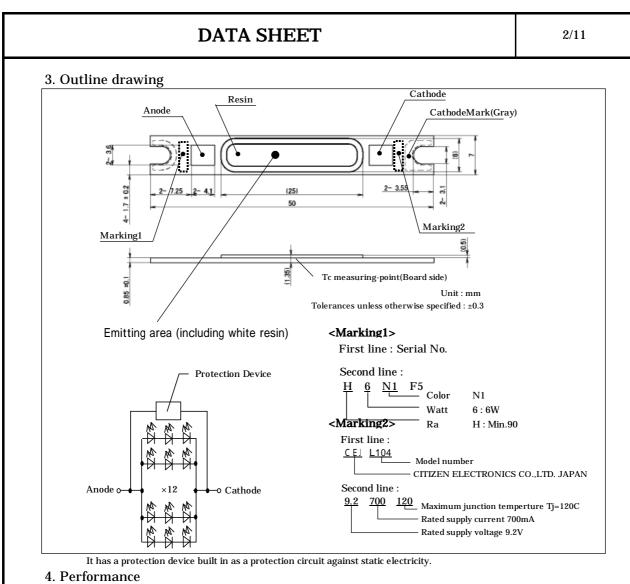

(1) Absolute Maximum Rating

lue Unit W
W
mA
mA
mA
5 C
00 C

*1 D.C. Current : $Tj = Tc + Rj-c \times PD$

Symbol	CITILED
Name	CL-L104-HC6N1-F5
CITIZEN	ELECTRONICS CO., LTD. JAPAN

Parame	eter	Symbol	Condition	n	Min.	Тур.	Max.	Unit	
Forward V	/oltage	$V_{\rm F}$	I _F =700m/	A	8.1	9.2	9.9	V	
Luminous	s Flux	$\Phi \mathbf{v}$	IF=700m/	A	450	565	-	lm	
General G		Ra	IF=700m/	A	90	-	-	-	
Thermal Re	sistance	Rj-c	Junction-cas	se	-	5.0	-	C/W	
Color rank		Center]	Referenc	e (ANSI (C78.377)		
outur rank i		Center			ĸeierend	e (AINPL)	U18.0(1)		
	x		v	Г	Color	rank	x	v	7
	x 0.3447	7 0	у .3553	F	Color	rank Center	x 0.3447	y 0.3553	(5028K
	0.3447	7 0 al parame	.3553	F	Coloi			ř	(5028K)
N1	0.3447	al parame	.3553	F	Color N1	Center	0.3447	0.3553	(5028K)
	0.3447 Ov	al parame 0	.3553 ter			Center a	0.3447 0.3551	0.3553	(5028K)
	0.344 Ov a	al parame 0 0	.3553 ter 00822			Center a b	0.3447 0.3551 0.3376	0.3553 0.3760 0.3616	(5028K)
N1 Color region st	0.3447 Ον a b θ° tay within	al parame 0 0 MacAdam '	.3553 ter 00822 00354 59.62 3.step" ellips		N1 om the chi	Center a b c d	0.3447 0.3551 0.3376 0.3366 0.3515	0.3553 0.3760 0.3616 0.3369	(5028K)
N1 Color region st The chromatic	0.3447 Ov a b θ° tay within city center	al parame 0 0 MacAdam ' refers to Al	.3553 ter 00822 00354 59.62 3.step" ellips ISI C78.377	:2008	N1 om the chr 3.	Center a b c d	0.3447 0.3551 0.3376 0.3366 0.3515	0.3553 0.3760 0.3616 0.3369	(5028K)
N1 Color region st The chromatic Please refer to	0.3447 Ον a b θ° tay within city center o ANSI C78	al parame 0 0 MacAdam ' refers to AI 3.377 for the	.3553 ter 00822 00354 59.62 3:step" ellip: ISI C78.377 s chromaticit	:2008 ty ce:	N1 om the chr 3. nter.	Center a b c d vomaticity c	0.3447 0.3551 0.3376 0.3366 0.3515	0.3553 0.3760 0.3616 0.3369	(5028K)
N1 Color region st The chromatic Please refer to Ə is the angle	0.3447 Ον a b θ° tay within city center o ANSI C78 between th	al parame 0 0 MacAdam ' refers to Al 3.377 for the e major axi	3553 ter 00822 00354 59.62 3 step" ellips ISI C78.377 chromaticit s of the ellip	:2008 ty ce: ise ar	N1 om the chr 3. nter. nd the xrau	Center a b c d romaticity c	0.3447 0.3551 0.3376 0.3366 0.3515 enter.	0.3553 0.3760 0.3616 0.3369 0.3487	(5028K)
N1 Color region st The chromatic Please refer to	0.3447 Ον a b θ° tay within city center o ANSI C78 between th	al parame 0 0 MacAdam ' refers to Al 3.377 for the e major axi	3553 ter 00822 00354 59.62 3 step" ellips ISI C78.377 chromaticit s of the ellip	:2008 ty ce: ise ar	N1 om the chr 3. nter. nd the xrau	Center a b c d romaticity c	0.3447 0.3551 0.3376 0.3366 0.3515 enter.	0.3553 0.3760 0.3616 0.3369 0.3487	(5028K)
N1 Color region st The chromatic Please refer to Ə is the angle	0.3447 Ον a b θ° tay within city center o ANSI C78 between th	al parame 0 MacAdam ' refers to Al 3.377 for the le major axi for and min	3553 ter 00822 00354 59.62 3 step" ellips ISI C78.377 chromaticit s of the ellip	:2008 ty ce: ise ar	N1 om the chr 3. nter. nd the xrau	Center a b c d romaticity c	0.3447 0.3551 0.3376 0.3366 0.3515 enter.	0.3553 0.3760 0.3616 0.3369 0.3487	(5028K)

Note: The tolerance of measurement at our tester is $V_{\rm F}\pm 3\%$, $\Phi v\pm 10\%$, $Chromaticity(x,y)\pm 0.01.$

0.37

0.36

0.36

0.35

0.34

0.33

0.32

0.33

ł 5200K 4800K

0.34 0.35 x

⊳


Color region


Color region (ANSI)

-B.B. Locus

Symbol	CITILED
Name	CL-L104-HC6N1-F5
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

3/11

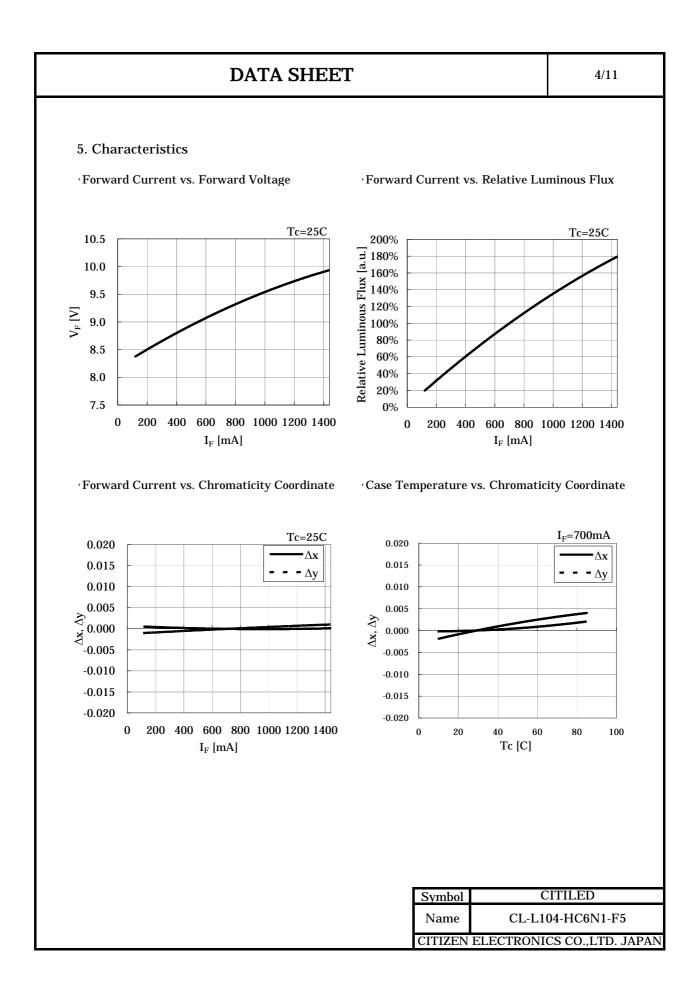

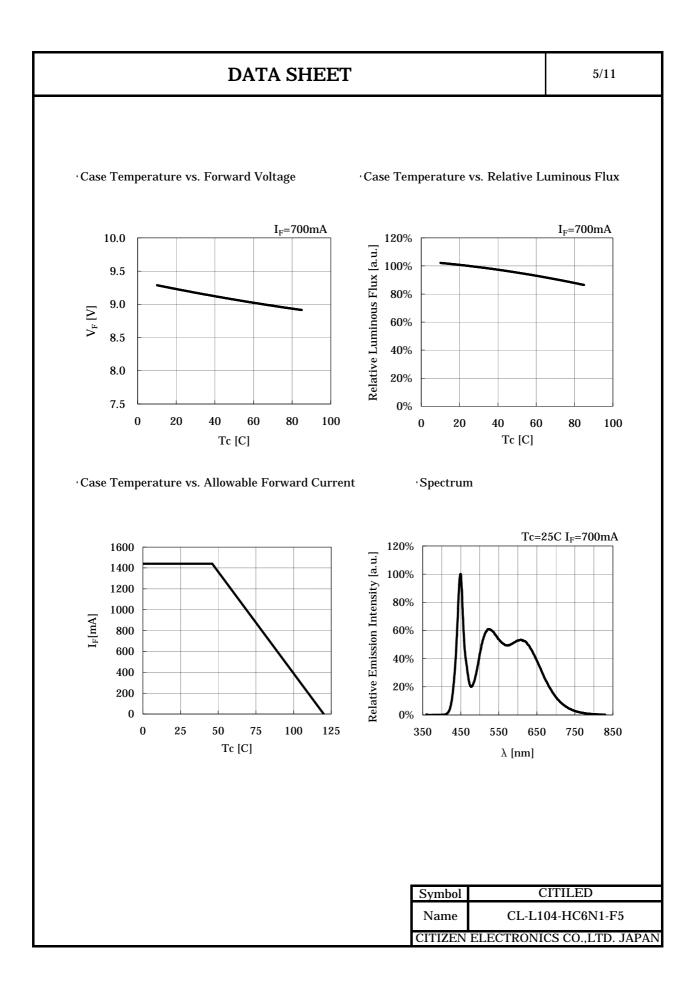

6. Reliability

(1) Details of the tests

Test Item	Test Condition		
	Ta=-30 C, I_F =700 mA× 1000 hours(with Al-fin)		
Continuous Operation Test	Ta=60 C, I_F =700 mA× 1000 hours(with Al-fin)		
	Ta=85 C, I _F =700 mA× 1000 hours(with Al-fin)		
Low Temperature Storage Test	-40 C × 1000 hours		
High Temperature Storage Test	100 C × 1000 hours		
Moisture-proof Test	60 C, 90 %RH for 1000 hours		
Thermal Shock Test	-40 C \times 30 minutes – 100 C \times 30 minutes, 100 cycle		

(2) Judgment Criteria of Failure for Reliability Test

(2) Judgment Criteria of Failure for Reliability Test (Ta=				
Measuring Item	Symbol	Measuring Condition	Judgment Criteria for Failure	
Forward Voltage	$V_{\rm F}$	I _F =700mA	> U × 1.1	
Total Luminous Flux	$\Phi \mathbf{v}$	I _F =700mA	< S × 0.85	

U defines the upper limit of the specified characteristics. S defines the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, and the test pieces should be returned to the normal ambient conditions after the completion of each test.

Symbol	CITILED
Name	CL-L104-HC6N1-F5
CITIZEN	ELECTRONICS CO., LTD. JAPAN

DATA SH	EET	7/11
7. Packing Specifications		
(1) Packing		
An empty tray is placed on top of a five-ti trays is banded together with two rubber (Smallest packing unit: 250 pieces) A label with product name, quantity, lot	bands.	
Tray (Dimensions: $310\times210\times11mm$ / M	aterials: Electrically conductive PS)	
< Packing figure >		
	Product 50pcs/tray	
< Example of indication label >		
CUSTOMER	1. TYPE CL-L104-HC 2. P.No. (Cutomer's P/N) e.g. xxx	C6N1-F5
TYPE CL-L104-HC6N1-F5(1)	3. Lot No. e.g. 132 00	
P.NO xxx(2) LOT No 132 001(3)	- First letter: Last digit of the year e.g. 13 : year - Second letter: Production month e.g. 2 : Feb	r 2013
Q'ty 250 pcs(4)	Note: October, November and December are design by X, Y and Z, respectively.	nated
CITIZEN ELECTRONICS	- Third letter: Control LOT including factory numb	er
	e.g. 001 4. Quantity e.g. 250 piec	ces
	Symbol	CITILED
		04-HC6N1-F5
	CITIZEN ELECTRONI	CS CO.,LTD. JAPAN

8. Precautions

 (1) 1. Handling with care for this product Both the light emitting area and white dam over the lig Please avoid the resin area from being pressed, stresse (e.g. edge of reflector part) because the function, perfor are negatively impacted. Please be aware that this product should not come into 	d, rubbed, cor mance and re	ne into contact with sharp metal nail liability of this product
while incorporating in your lighting apparatus or your		
 (2) Countermeasure against static electricity -Handling of this product needs countermeasures again because this is a semiconductor product. -Please take adequate measures to prevent any static e such as the wearing of a wristband or anti-static glove 	lectricity bein	g produced
-Every manufacturing facility in regard to the product (and conveyance unit) should be connected to ground a -ESD sensitivity of this product is over 1000V (HBM, ba	nd please avo ased on JEITA	id the product to be electric-charged. A ED-4701/304).
-After assembling the LEDs into your final product(s), i whether the assembled LEDs are damaged by static el -It is easy to find static damaged LED dies by a light-on	lectricity (elec	trical leak phenomenon) or not.
 (3) Caution of product assembly Regarding this product assembling on the heat sink, i It might be good for screw tightening on the heat sink In addition, please don't press with excess stress on t The condition of the product assembling on the heat s needs to be optimized according to the specification of Roughness, unevenness and burr of surface negatively between the product and heat sink and increase heat Confidence of thermally and mechanical coupling bet by checking the mounting surface and measuring the In order to reduce the thermal resistance at assembly TIM (Thermal Interface Material) on whole contact s In case of using thermal grease for the TIM, it might on the contact surface of the product. In case of using it might be good to make sure that the product is NO when the screws are tightened for assembly. 	to do tempor he product. ink and the co f the heat sinl y impact ther thermal resis ween the proc case tempera , it might be g urface of the p be good to ap thermal shee	eary tightening and final tightening. ontrol of screw tightening torque c. mal bonding stance between them. duct and heat sink are confirmed ature of the product. good to use oroduct. ply uniformly t for the TIM,
	Symbol	CITILED
	Name	CL-L104-HC6N1-F5
		ELECTRONICS CO.,LTD. JAPAN

(4) Thermal Design

-The thermal design to draw heat away from the LED junction is most critical parameter for an LED illumination system. High operating temperatures at the LED junction adversely affect the performance of LED's light output and lifetime. Therefore the LED junction temperature should not exceed the absolute maximum rating in LED illumination system.

-The LED junction temperature while operation of LED illumination system depends upon thermal resistance of internal LED package (Rj-c), outer thermal resistances of LED package, power loss and ambient temperature. Please take both of the thermal design specifications and ambient temperature conditions into consideration for the setting of driving conditions. -For more information, please refer to application note "Thermal Management".

(5) Driving Current

-A constant current is recommended as an applying driving current to this product.
In the case of constant voltage driving, please connect current-limiting resistor to each products in series and control the driving current to keep under the absolute maximum rating forward current value.
-Electrical transient might apply excess voltage, excess current and reverse voltage to the product(s). They also affect negative impact on the product(s) therefore please make sure that no excess voltage, excess current and reverse voltage is applied to the product(s)

- when the LED driver is turn-on and/or turn-off.
- -For more information, please refer to application note "Driving".

(6) Lighting at a minimum current value

-In a case where the minimum current(IF min) is applied to the product, some of LED dice in the product might look different in their brightness due to the individual difference of the LED dice, and they are not failed.

(7) Electrical Safety

-This product is designed and produced according to IEC 62031:2008

(IEC 62031:2008 LED modules for general lighting. Safety specification)

-Dielectric voltage withstand test has been conducted on this product to see any failure after applying voltage between active pads and aluminum section of the product, and to pass at least 500V.

-Considering conformity assessment for IEC62031:2008, almost all items of the specification depend upon your final product of LED illumination system.

Therefore, please confirm with your final product for electrical safety of your product. As well, the products comply with the criteria of IEC62031:2008 as single LED package.

Symbol	CITILED	
Name	CL-L104-HC6N1-F5	
CITIZEN I	ELECTRONICS CO., LTD. JAPAN	

8. Precautions (continued)

 (8) Recommended soldering Condition (This product is n -For manual soldering Please use lead-free soldering. Soldering shall be implemented using a soldering bit at and shall be finished within 3.5 seconds for one land. No external force shall be applied to resin part while so Next process of soldering should be carried out after th -For soldering correction Regarding soldering correction, above conditions shall 	t a temperatu oldering is im le product has be applied.	ure lower than 350C, plemented. s return to ambient temperature.
* Citizen Electronics cannot guarantee if usage exceeds Please use it after sufficient verification is carried out or		
 (9) Eye Safety The International Electrical Commission (IEC) publishe "2006 Photobiological safety of lamps and lamp system" When sorting single LEDs according to IEC 62471, alm as belonging to either Exempt Group (no hazard) or Ris However, Optical characteristics of LEDs such as radia spectrum and light distribution are factors that affect and especially a high-power LED, that emits light cont might have properties equivalent to those of Risk Grou Great care should be taken when directly viewing an LI has multiple uses as a module or when focusing the lig as these actions might greatly increase the hazard to yd It is recommended to regard the evaluation of stand-alo and to evaluate your final product. (10) This product is not designed for usage under the fol If the product might be used under the following conditi and appropriate them. In places where the product mig -directly and indirectly get wet due to rain and/or at pl -be damage by seawater and/or at place with the fear -be exposed to corrosive gas (such as Cl2, H2S, NH3, S -be exposed to dust, fluid or oil and/or at place with the 	ns " which inc nost all white sk Group 1 (le nt flux, the risk group aining blue w p 2 (moderat ED that is dri ht with optica our eyes. one LED pack llowing condi ions, you sha ght: lace with the GOx, NOx and	ludes LEDs within its scope. LEDs can be classified ow risk). p determination of the LED, vavelengths, e risk). iven at high current, al instruments, cages as a reference tions. Il evaluate its effect fear.
	Symbol	CITILED
	Name	CL-L104-HC6N1-F5
	CITIZEN	ELECTRONICS CO.,LTD. JAPAN

 (1) This document is provided for reference purposes only so that CITIZEN ELECTRONICS products are used as intended. CITIZEN ELECTRONICS neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any nitrellectual property rights or any other rights of CITIZEN ELECTRONICS or any third party with respect to the information in this document. (2) All information included in this document such as product data, diagrams, charts, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production. (3) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document. but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document. (4) Absent 4 written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, including warranties and conditions of related to sale, use of product, or information, including warranties and conditions of related to sale, use of product, or information, including warranties and conditions of related as a result of the sole current. The date design and a signed store compliting with safety standards and for providing adequate designs and safeguards to so corruption. In addition, customers are also responsible for determining the appropriateness of use	9. Precautions with regard to product use		
 is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production. (3) CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document. but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document. (4) Absent i written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, including warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement. (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or fail. Customers sponsible for downplying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations. (b) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, with evaluating by their own but also by the entire system. (TTIZEN ELECTRONICS assumes no liability for customers' pro	products are used as intended. CITIZEN ELECTRON representations with respect to the accuracy or comple in this document nor grants any license to any intellec rights of CITIZEN ELECTRONICS or any third party	NICS neither eteness of the ctual property	makes warranties or e information contained y rights or any other
included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document. (4) Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement. (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications. CHTIZEN HumanTech is a registered trademark of Citizen Holding Co., Japan. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITIZEN S a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan	is current as of the date this document is issued. Such information, however, is subject to change witho Before purchasing or using any CITIZEN ELECTRON please confirm the latest product information with a C	ut any prior : NICS' product CITIZEN ELF	notice. ts listed in this document, ECTRONICS' sales office,
sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement. (5) Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications. (9) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan	included in this document, but CITIZEN ELECTRONICS assumes no liability wh	hatsoever for	any damages incurred as
products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications. (6) Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan Symbol CITILED Name CL-L104-HC6N1-F5	sale for product, and to the maximum extent allowable assumes no liability whatsoever, including without lin or incidental damages or loss, including without limits business interruption and loss of data, and disclaims a and conditions related to sale, use of product, or inform or conditions of merchantability, fitness for a particula	e by law, CIT mitation, ind ation, loss of any and all ex nation, inclu	IZEN ELECTRONICS irect, consequential, special, profits, loss of opportunities, xpress or implied warranties ding warranties
the information contained in this document, or if you have any other inquiries. CITIZEN Micro HumanTech is a registered trademark of Citizen Holding Co., Japan. CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan <u>Symbol</u> <u>CITILED</u> Name <u>CL-L104-HC6N1-F5</u>	products can malfunction or fail. Customers are respo and for providing adequate designs and safeguards to in which a malfunction or failure of a product could ca bodily injury or damage to property, including data los In addition, customers are also responsible for determ use of any information contained in this document suc evaluating by their own but also by the entire system.	nsible for con minimize ris use loss of hu ss or corrupti ining the app ch as applicat	nplying with safety standards k and avoid situations uman life, on. propriateness of tion cases not only with
CITILED is a registered trademark of CITIZEN ELECTRONICS CO., LTD. Japan Symbol CITILED Name CL-L104-HC6N1-F5			
Name CL-L104-HC6N1-F5	C C	• ·	
Name CL-L104-HC6N1-F5			
Name CL-L104-HC6N1-F5		Symbol	CITILED
CITIZEN ELECTRONICS CO., LTD. JAPAN			
		CITIZEN I	ELECTRONICS CO.,LTD. JAPAN