# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet**

# **Chip LED with Right Angle Resin**

### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version

### Descriptions

- The 27-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### Applications


- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**


Part No.	Chip Material	Emitted Color	Resin Color	
27-21UYC/S530-A3/TR8	AlGaInP	Brilliant Yellow	Water Clear	




### **Package Outline Dimensions**





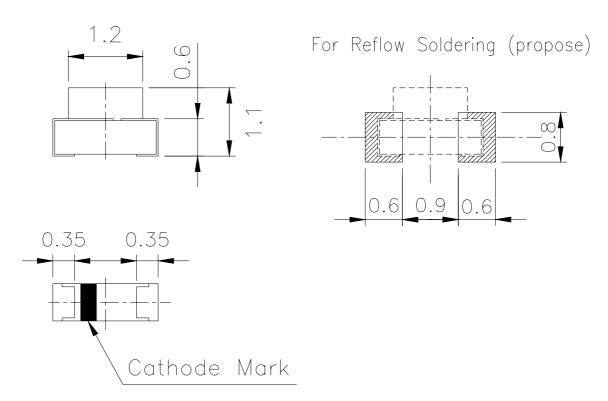



EVERLIGHT ELECTRONICS CO.,LTD.

### 27-21UYC/S530-A3/TR8

#### Absolute Maximum Ratings (Ta=25°C)

**EVERLIGHT** 

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V <sub>R</sub>	5	V	
Forward Current	I <sub>F</sub>	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	$I_{\mathrm{FP}}$	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Soldering Temperature	Tsol	Reflow Soldering : $260^{\circ}$ C for 10sec. Hand Soldering : $350^{\circ}$ C for 3 sec		

#### Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	36	57		mcd		
Viewing Angle	2 <del>0</del> 1/2		130		deg		
Peak Wavelength	λp		591		nm		
Dominant Wavelength	λd		589		nm	I <sub>F</sub> =20mA	
Spectrum Radiation Bandwidth	$ riangle \lambda$		15		nm		
Forward Voltage	VF	1.7	2.0	2.7	V		
Reverse Current	I <sub>R</sub>			10	$\mu A$	$V_R = 5V$	


EVERLIGHT ELECTRONICS CO., LTD.


### 27-21UYC/S530-A3/TR8

Ta=25°C

### **Typical Electro-Optical Characteristics Curves**

EVERLIGHT

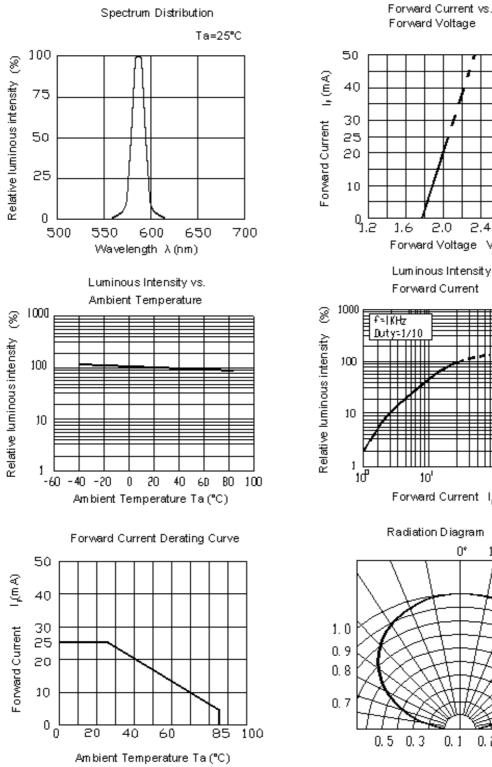

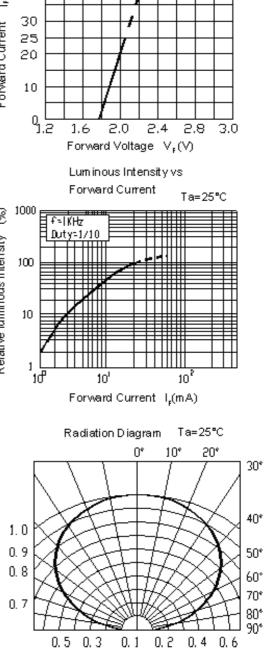


### Label explanation


**CAT: Luminous Intensity Rank** 

HUE: Dom. Wavelength Rank

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

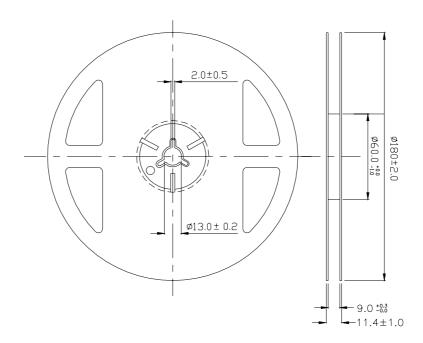

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

EVERLIGHT ELECTRONICS CO.,LTD.


### 27-21UYC/S530-A3/TR8

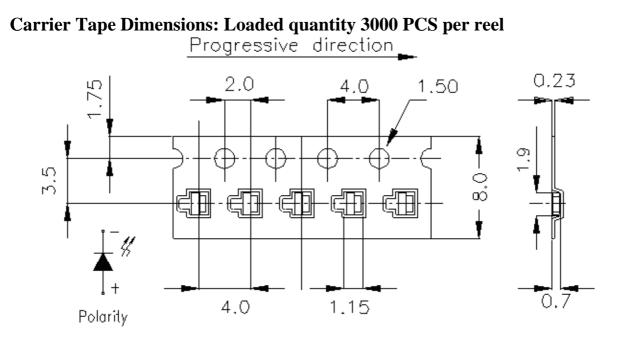

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

### **Moisture Resistant Packaging**

EVERLIGHT

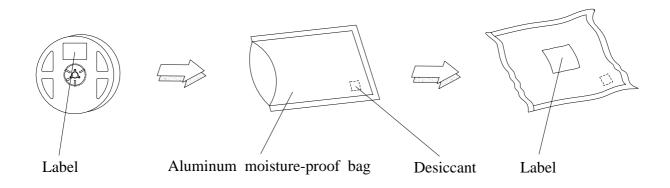

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C ±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

### **Precautions For Use**

1. Over-current-proof


Customer must apply resistors for protection , otherwise slight voltage shift will cause big

current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^\circ$ C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under  $30^{\circ}$ C or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

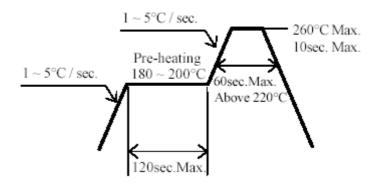


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

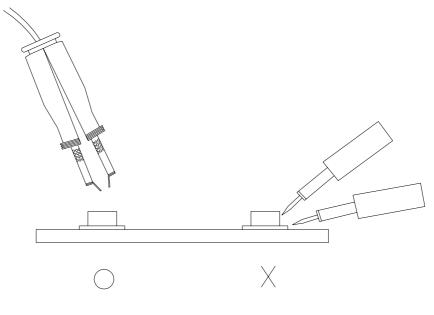

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

http://www.everlight.com Prepared date: 12-Aug-2008