STL12N65M2



N-channel 650 V, 0.62 Ω typ., 5 A MDmesh™ M2 Power MOSFET in a PowerFLAT™ 5x6 HV package

Datasheet - production data


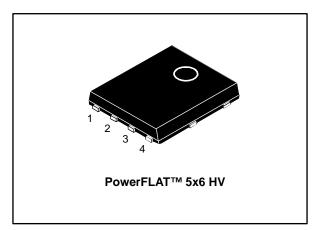


Figure 1: Internal schematic diagram

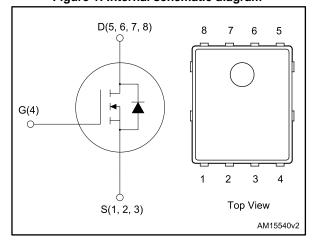

Features

| Order code | V _{DS} | R _{DS(on)} max. | I _D | Ртот |
|------------|-----------------|--------------------------|----------------|------|
| STL12N65M2 | 650 V | 0.75 Ω | 5 A | 48 W |

- Extremely low gate charge
- Excellent output capacitance (C_{OSS}) profile
- 100% avalanche tested
- Zener-protected

Applications

Switching applications

Description

This device is an N-channel Power MOSFET developed using MDmesh™ M2 technology. Thanks to its strip layout and an improved vertical structure, the device exhibits low on-resistance and optimized switching characteristics, rendering it suitable for the most demanding high efficiency converters.

Table 1: Device summary

| Order code | Marking | Package | Packing |
|------------|---------|-------------------|---------------|
| STL12N65M2 | 12N65M2 | PowerFLAT™ 5x6 HV | Tape and reel |

Contents STL12N65M2

Contents

| 1 | Electric | al ratings | 3 |
|---|----------|--------------------------------------|----|
| 2 | Electric | al characteristics | 4 |
| | 2.1 | Electrical characteristics (curves) | 6 |
| 3 | Test cir | cuits | 8 |
| 4 | Packag | e information | 9 |
| | 4.1 | PowerFLAT 5x6 HV package information | 10 |
| | 4.2 | PowerFLAT™ 5x6 packing information | 12 |
| 5 | Revisio | n history | 14 |

STL12N65M2 Electrical ratings

1 Electrical ratings

Table 2: Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|--------------------------------|--|------------|-------|
| V _{GS} | Gate-source voltage | ±25 | V |
| 1 | Drain current (continuous) at T _{case} = 25 °C | 5 | Α |
| I _D | Drain current (continuous) at T _{case} = 100 °C | 3.15 | A |
| I _{DM} ⁽¹⁾ | Drain current (pulsed) | 20 | Α |
| P _{TOT} | Total dissipation at T _{case} = 25 °C | 48 | W |
| dv/dt ⁽²⁾ | Peak diode recovery voltage slope | 15 | V/ns |
| dv/dt ⁽³⁾ | dv/dt ⁽³⁾ MOSFET dv/dt ruggedness | | V/IIS |
| T _{stg} | Storage temperature | -55 to 150 | °C |
| T _j | T _j Operating junction temperature | | |

Notes:

Table 3: Thermal data

| Symbol | Parameter | Value | Unit |
|-------------------------------------|----------------------------------|----------------------|------|
| R _{thj-case} | Thermal resistance junction-case | 2.6 | °C/W |
| R _{thj-pcb} ⁽¹⁾ | Thermal resistance junction-pcb | ance junction-pcb 50 | |

Notes:

Table 4: Avalanche characteristics

| Symbol | Parameter | Value | Unit |
|--------------------------------|--|-------|------|
| I _{AR} ⁽¹⁾ | Avalanche current, repetitive or not repetitive | 0.5 | Α |
| E _{AS} ⁽²⁾ | E _{AS} ⁽²⁾ Single pulse avalanche energy | | mJ |

Notes:

 $^{^{\}left(1\right)}$ Pulse width is limited by safe operating area.

 $^{^{(2)}}$ $I_{SD} \le 5$ A, di/dt=400 A/µs; V_{DS} peak < $V_{(BR)DSS}.$

 $^{^{(3)}} V_{DS} \le 520 V.$

 $^{^{(1)}}$ When mounted on a 1-inch² FR-4, 2 Oz copper board.

 $^{^{\}left(1\right)}$ Pulse width limited by $T_{jmax}.$

 $^{^{(2)}}$ starting T_{j} = 25 °C, I_{D} = $I_{AR},\,V_{DD}$ = 50 V.

Electrical characteristics STL12N65M2

2 Electrical characteristics

(T_{case} = 25 °C unless otherwise specified)

Table 5: Static

| Symbol | Parameter | Test conditions | Min. | Тур. | Max. | Unit |
|---------------------|---------------------------------------|--|------|------|------|------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage | $V_{GS} = 0 \text{ V}, I_D = 1 \text{ mA}$ | 650 | | | V |
| | Zara gata valtaga drain | $V_{GS} = 0 \text{ V}, V_{DS} = 650 \text{ V}$ | | | 1 | |
| I _{DSS} | Zero gate voltage drain current | $V_{GS} = 0 \text{ V}, V_{DS} = 650 \text{ V},$ $T_{case} = 125 \text{ °C}$ | | | 100 | μΑ |
| I _{GSS} | Gate-body leakage current | $V_{DS} = 0 \text{ V}, V_{GS} = 25 \text{ V}$ | | | ±10 | μΑ |
| V _{GS(th)} | Gate threshold voltage | $V_{DS} = V_{GS}, I_{D} = 250 \mu A$ | 2 | 3 | 4 | V |
| R _{DS(on)} | Static drain-source on- resistance | V _{GS} = 10 V, I _D = 3 A | | 0.62 | 0.75 | Ω |

Table 6: Dynamic

| Symbol | Parameter | Test conditions | Min. | Тур. | Max. | Unit |
|--------------------|-------------------------------|--|------|------|------|------|
| C _{iss} | Input capacitance | | - | 410 | 1 | |
| Coss | Output capacitance | $V_{DS} = 100 \text{ V}, f = 1 \text{ MHz},$ | - | 20 | - | pF |
| C _{rss} | Reverse transfer capacitance | $V_{GS} = 0 V$ | - | 0.9 | - | ρı |
| Coss (1) eq. | Equivalent output capacitance | $V_{DS} = 0$ to 520 V, $V_{GS} = 0$ V | - | 83 | - | pF |
| R_{G} | Intrinsic gate resistance | f = 1 MHz open drain | - | 6.4 | - | Ω |
| Qg | Total gate charge | $V_{DD} = 520 \text{ V}, I_D = 7 \text{ A},$ | - | 12.5 | - | |
| Q _{gs} | Gate-source charge | V _{GS} = 10 V (see <i>Figure 15</i> : | - | 3.2 | - | nC |
| Q_{gd} | Gate-drain charge | "Gate charge test circuit") | - | 5.8 | - | |

Notes:

Table 7: Switching times

| Symbol | Parameter | Test conditions | Min. | Тур. | Max. | Unit |
|---------------------|---------------------|---|------|------|------|------|
| t _{d(on)} | Turn-on delay time | $V_{DD} = 325 \text{ V}, I_D = 3.5 \text{ A}$ | - | 9.5 | - | |
| t _r | Rise time | $R_G = 4.7 \Omega$, $V_{GS} = 10 V$ (see Figure 14: "Switching times | - | 7.5 | - | |
| t _{d(off)} | Turn-off delay time | test circuit for resistive load" | - | 26 | - | ns |
| t _f | Fall time | and Figure 19: "Switching time waveform") | - | 15 | - | |

 $^{^{(1)}}$ $C_{oss\ eq.}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS} .

Table 8: Source-drain diode

| Symbol | Parameter | Test conditions | Min. | Тур. | Max. | Unit |
|---------------------------------|-------------------------------|--|------|------|------|------|
| I _{SD} | Source-drain current | | - | | 5 | Α |
| I _{SDM} ⁽¹⁾ | Source-drain current (pulsed) | | - | | 20 | Α |
| V _{SD} ⁽²⁾ | Forward on voltage | $V_{GS} = 0 \text{ V}, I_{SD} = 5 \text{ A}$ | - | | 1.6 | V |
| t _{rr} | Reverse recovery time | $I_{SD} = 7.5 \text{ A}, \text{ di/dt} = 100 \text{ A/}\mu\text{s},$ | - | 318 | | ns |
| Q_{rr} | Reverse recovery charge | V _{DD} = 60 V (see Figure 16: "Test circuit for inductive load | - | 2.5 | | μC |
| I _{RRM} | Reverse recovery current | switching and diode recovery times") | ı | 15.5 | | Α |
| t _{rr} | Reverse recovery time | $I_{SD} = 7.5 \text{ A}, \text{ di/dt} = 100 \text{ A/}\mu\text{s},$ | - | 437 | | ns |
| Q _{rr} | Reverse recovery charge | V_{DD} = 60 V, T_j = 150 °C (see Figure 16: "Test circuit for | - | 3.2 | | μC |
| I _{RRM} | Reverse recovery current | inductive load switching and diode recovery times") | - | 15 | | Α |

Notes:

 $^{^{\}left(1\right) }$ Pulse width is limited by safe operating area.

 $^{^{(2)}}$ Pulse test: pulse duration = 300 $\mu s,$ duty cycle 1.5%.

2.1 Electrical characteristics (curves)

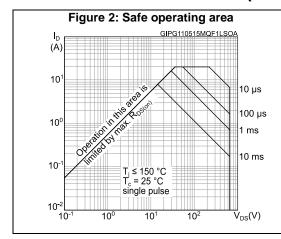
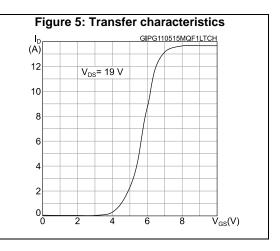
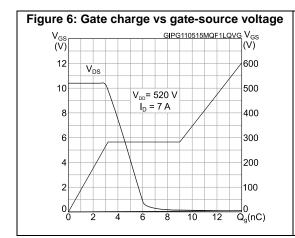
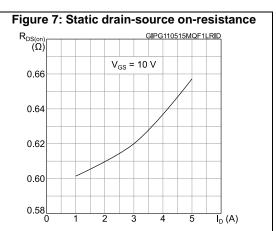


Figure 3: Thermal impedance $\begin{array}{c} K \\ \delta = 0.5 \\ \hline 0.2 \\ \hline 10^{1} \\ \hline 0.1 \\ \hline 0.1 \\ \hline 0.02 \\ \hline 0.02 \\ \hline 0.01 \\ \hline \end{array}$ $\begin{array}{c} C_{th} = k R_{thJ-c} \\ \delta = t_{p}/\tau \\ \hline \end{array}$ $\begin{array}{c} C_{th} = k R_{thJ-c} \\ \delta = t_{p}/\tau \\ \hline \end{array}$







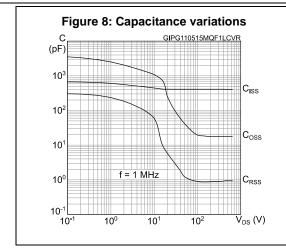


Figure 10: Normalized on-resistance vs temperature

R_{DS(on)} GIPG110515MQF1LRON
(norm.)

2.2

1.8


1.4


1.0


0.6

0.2

-75 -25 25 75 125 T_j (°C)

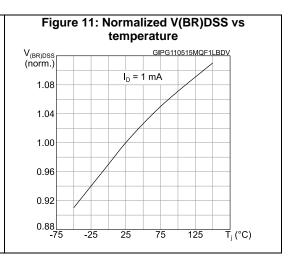

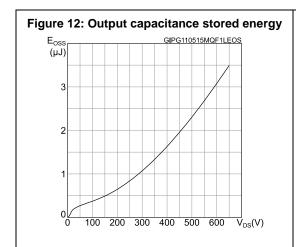


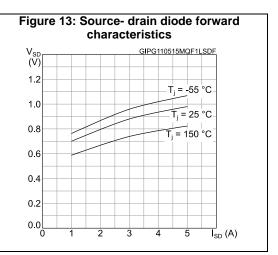

Test circuits STL12N65M2

3 Test circuits

3 rest circuits

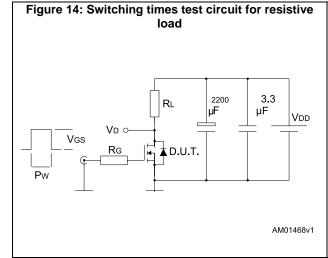

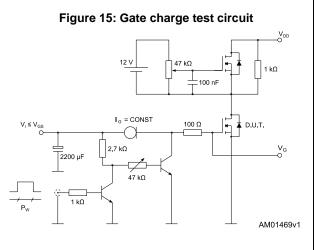


Figure 16: Test circuit for inductive load switching and diode recovery times



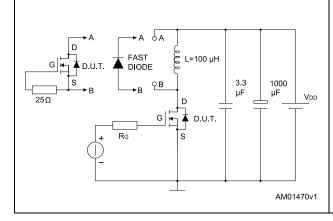


Figure 17: Unclamped inductive load test circuit

Figure 18: Unclamped inductive waveform

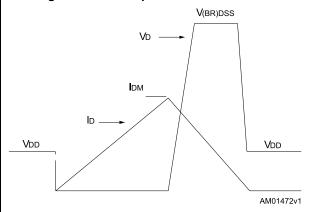

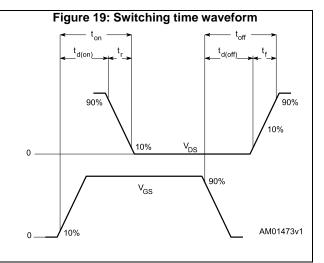

577

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of $\mathsf{ECOPACK}^{\otimes}$ packages, depending on their level of environmental compliance. $\mathsf{ECOPACK}^{\otimes}$ specifications, grade definitions and product status are available at: www.st.com. $\mathsf{ECOPACK}^{\otimes}$ is an ST trademark.



4.1 PowerFLAT 5x6 HV package information

Figure 20: PowerFLAT™ 5x6 HV package outline


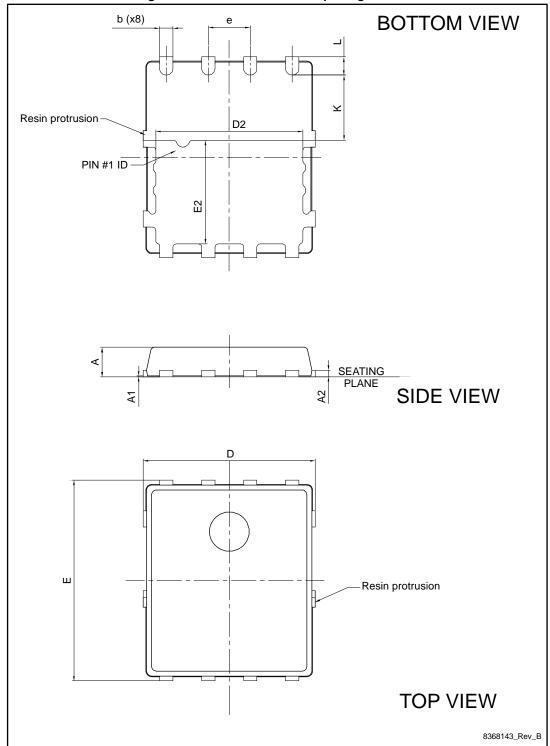


Table 9: PowerFLAT™ 5x6 HV package mechanical data

| Dim. | | mm | |
|------|------|------|------|
| Dim. | Min. | Тур. | Max. |
| Α | 0.80 | | 1.00 |
| A1 | 0.02 | | 0.05 |
| A2 | | 0.25 | |
| b | 0.30 | | 0.50 |
| D | 5.00 | 5.20 | 5.40 |
| Е | 5.95 | 6.15 | 6.35 |
| D2 | 4.30 | 4.40 | 4.50 |
| E2 | 3.10 | 3.20 | 3.30 |
| е | | 1.27 | |
| L | 0.50 | 0.55 | 0.60 |
| K | 1.90 | 2.00 | 2.10 |

Figure 21: PowerFLAT™ 5x6 HV recommended footprint (dimensions are in mm)

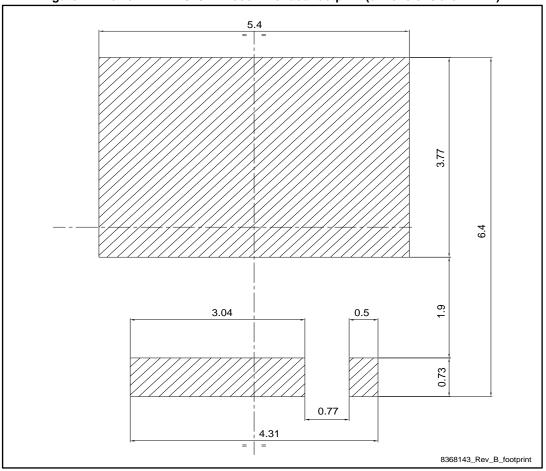

Package information STL12N65M2

4.2 PowerFLAT™ 5x6 packing information

Figure 22: PowerFLAT™ 5x6 tape (dimensions are in mm)


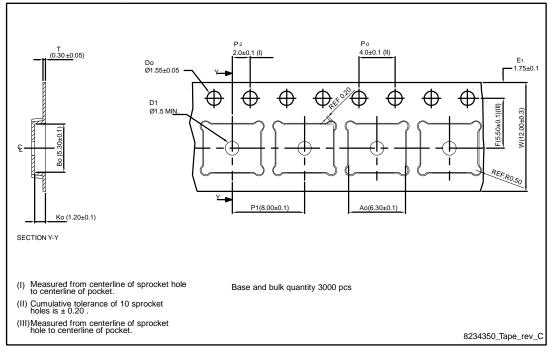


Figure 23: PowerFLAT™ 5x6 package orientation in carrier tape

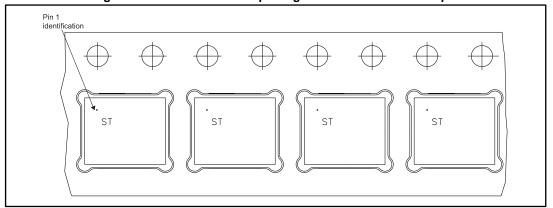

12/15

R1.10

R1.10

R1.10

R1.10

R2.500

R1.10

R2.500

R1.10

Revision history STL12N65M2

5 Revision history

Table 10: Document revision history

| Date | Revision | Changes |
|-------------|----------|----------------|
| 11-May-2015 | 1 | First release. |

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics - All rights reserved

