
# Pomona®

# Model 4963 Phono Plug To BNC Male

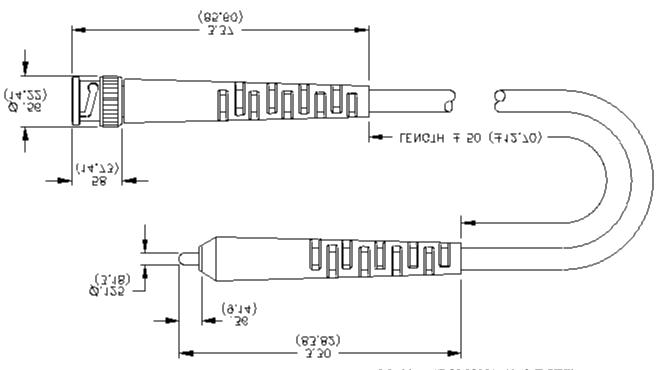

#### **FEATURES:**

- •Converts a Female Phono (RCA) Jack to a BNC Male •Converts a BNC Female Jack into a Phono (RCA)
- Plug
- •Lengths other than those specified are available on request.

# **MATERIALS:**

Conn: 1<sup>st</sup> End-Phono Plug

Material: Body and Center Contact – Brass.
Finish: Body and Center Contact – Nickel plated.
Strain Relief Boot: PVC molded to Phono plug and cable.
Color: Black.
Cable: Coaxial, RG 59B/U.
Impedance: 75 Ohms 6.15 (.242) O.D.

Marking: "POMONA 4963-E-XX".

Conn: 2<sup>nd</sup> End-BNC Male

Finish: Body and fittings – Tarnish resistant. Center Contact – Gold plated per MIL-C-39012. Strain Relief Boot: PVC molded to BNC plug and cable. Color: Black.

## **RATINGS:**

Operating Temperature: +50°C. (+122°F.) Max. Operating Voltage: 500 VRMS/DC

## ORDERING INFORMATION: Model 4963-E-XX

XX=Cable length, Standard Lengths: 24" (610), 36" (914), 48" (1219), 60" (1524) Ordering Example: 4963-E-60 indicates 60" in length

All dimensions are in inches. Tolerances (except noted):  $xx = \pm .02$ " (.51 mm),  $xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361	Fax: 888-403-3360
SY/EH/LS	Technical Assistan	ace: 800-241-2060
C:\Laura Goldberg\FlukeDataS	heet\d4963 1 01.doc	

PomonaACCESS 90610 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1