
OA5920 'Challenger Series'



AC Fan - 115V, 230V 172 x 150 x 51mm (6.7"x 5.9" x 2.0")



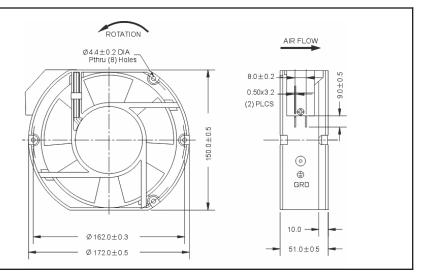

Frame	Diecast Aluminum	Operating Temperature	0.60	
Impeller	PBT, UL94V-0 plastic	Operating Temperature Ball Bearing -10C ~ +70C Storage Temp -40C ~ +80C Life Expectancy Ball Bearing 60,000 hours (L10 at 40C)	0.50	
Connection	Terminals		Static Pressure ("H20) 0.30 0.20	
Motor	Shaded pole, thermally protected			
Bearing System	Dual ball (Sleeve available)	Weight: 2.0 lbs.	0.10	
Insulation Resistance	>100M ohm between leadwire and frame (500VDC)		0.00 0 50 100 150 200	
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	Airflow (CFM)		

Part Number	OA5920-12TB	OA5920-23TB
Nominal Voltage	115 VAC	230 VAC
Voltage Range	80 ~ 130 VAC	160 ~ 260 VAC
Rated Power	41 W (60Hz)	41 W (60Hz)
Rated Speed (RPM)	3000	3000
Airflow (CFM)	180	180
Noise Level (dB)	55	55
Max. Static Pressure	0.51" H ₂ O	0.51" H ₂ O

