

AVE450B Series

450 Watts

Data Sheet

Total Power: 450 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 Wide input range
- Extra wide trim range 14 V - 33 V for 28 Vo
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium substrate design

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input range	36 - 75 Vdc
Efficiency ²	94.5%
Output	
Voltage	28 V +/--1%
Line regulation	+/- 0.05%
Load regulation	+/- 0.1%
Noise/ripple	200 mV
Overvoltage protection	Latch off
Overtemperature protection	Auto-restart
Switching frequency	320 KHz
Temperature co-efficient	±0.02/°C
Isolation	
I/O isolation	1500 VDC min.

Environmental Specifications


Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	6/6

Ordering Information

Model number	Input voltage	Output voltage	Power
AVE450B-48S28-6L/M	36 - 75 Vin	28 V @ 16 A	450 W
AVE450B-48S28P-6L	36 - 75 Vin	28 V @ 16 A	450 W
AVE450B-48S28-6L	36 - 75 Vin	28 V @ 16 A	450 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-L" = RoHS 6/6 compliance
- "-M" = Thread hole fixture
- "P" = Positive remote control

Mechanical Drawings

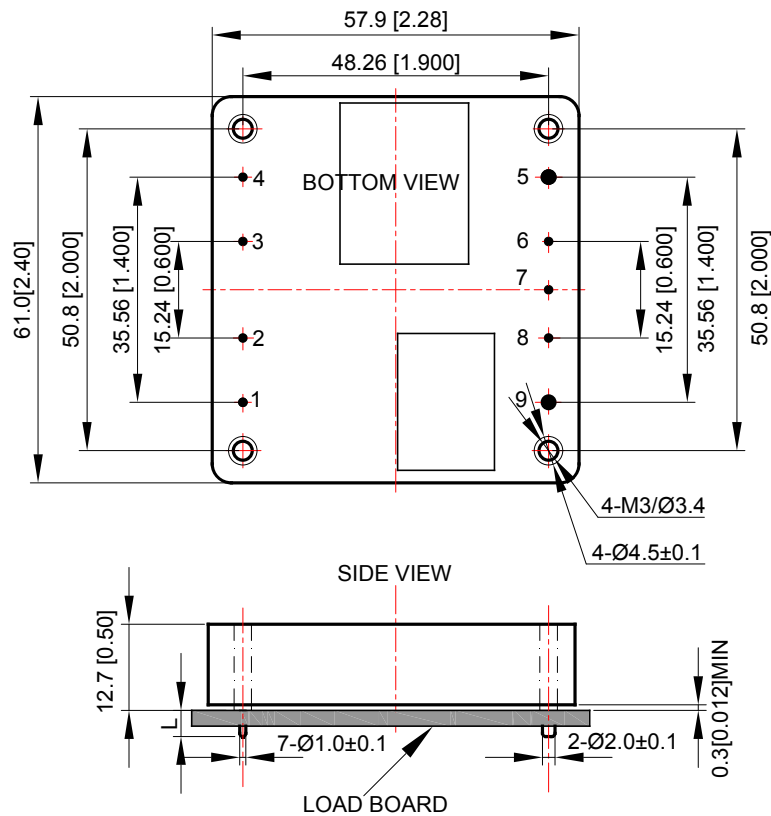

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]

X.XXmm±0.25mm[X.XXX in.±0.01in.]

Pin Length Option

Device code suffix	L
-4	4.8 mm ± 0.5 mm
-6	3.8 mm ±0.5 mm
-8	2.8 mm ± 0.5 mm
None	5.8 mm ± 0.5 mm

Pin Designations

Pin No.	Name	Function
1	V_{in+}	Positive input voltage
2	CNT	Remote ON/OFF control
3	Case	Case
4	V_{in-}	Negative input voltage
5	V_{o-}	Negative output voltage
6	S-	Negative remote sense
7	Trim	Output voltage trim
8	S+	Positive remote sense
9	V_{o+}	Positive output voltage

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com